

NETWORK CAMERAS

Pro Series Network Cameras with ColorVu 3.0



ColorVu 3.0 AcuSense 3.0

DS-2CD20X763-LIS2UY/SL

- X=4/6/8 MP
- Strobe light & audio alarm
- HiKAI-ISP, 4 MP, 0.0001 lux@F1.0
- IR/white light up to 40 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



ColorVu 3.0 AcuSense 3.0

DS-2CD21X763-LIS2UY

- X=4/6/8 MP
- HiKAI-ISP, 4 MP, 0.0001 lux @ F1.0
- IR/white light up to 30 m
- Arrayed Dual-Mic
- IP67, IK10, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



HIKVISION

ColorVu 3.0 AcuSense 3.0

DS-2CD23X763-LIS2UY/SL

- X=4/6/8 MP
- Strobe light & audio alarm
- HiKAI-ISP, 4 MP, 0.0001 lux@F1.0
- IR/white light up to 30 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



ColorVu 3.0 AcuSense 3.0

DS-2CD2TX763-LIS2UY/SL

- X=4/6/8 MP
- Strobe light & audio alarm
- HiKAI-ISP, 4 MP, 0.0001 lux@F1.0
- IR/white light up to 60 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



ColorVu 3.0 AcuSense 3.0

DS-2CD26X763-LIS2UY/SL

- X=4/6/8 MP, 2.8-12 mm
- Strobe light & audio alarm
- HiKAI-ISP, 4 MP, 0.0005 lux@F1.2
- IR/white light up to 60 m
- Arrayed Dual-Mic
- IP67, IK10, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



NEW

ColorVu 3.0 AcuSense 3.0

DS-2CD2HX763-LIS2UY/SL(RB)

- X=4/6/8 MP, 2.8-12 mm
- Strobe light & audio alarm
- HiKAI-ISP, 4 MP, 0.0005 lux@F1.2
- IR/white light up to 40 m
- Arrayed Dual-Mic
- IP67, IK10, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging

Pro Series Network Cameras with Smart Hybrid Light



Smart Hybrid Light AcuSense 3.0

DS-2CD20X362-LI2U/SL(RB)

- X=4/6/8 MP
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 40 m
- Arrayed Dual-Mic
- IP67



Smart Hybrid Light AcuSense 3.0

DS-2CD21X362-LI

- X=4/6/8 MP
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- IP67, IK10



Smart Hybrid Light AcuSense 3.0

DS-2CD23X362-LI2U/SL(RB)

- X=4/6/8 MP
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- Arrayed Dual-Mic
- IP67



Smart Hybrid Light AcuSense 3.0

DS-2CD2TX362-LIS2U/SL(RB)

- X=4/6/8 MP
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 60 m
- Arrayed Dual-Mic
- IP67



Smart Hybrid Light AcuSense 3.0

DS-2CD2TX362-2LI2U

- X=4/6/8 MP
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 60 m
- Arrayed Dual-Mic
- IP67



Smart Hybrid Light AcuSense 3.0

DS-2CD2TX362-4LI2U

- X=4/6/8 MP
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 80 m
- Arrayed Dual-Mic
- IP67



NETWORK CAMERAS

Pro Series Network Cameras with Smart Hybrid Light



Smart Hybrid Light AcuSense 3.0

DS-2CD26X362-LIZS2U/SL(RB)

- X=4/6/8 MP, 2.8-12 mm
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 60 m
- Arrayed Dual-Mic
- IP67, IK10



Smart Hybrid Light AcuSense 3.0

DS-2CD27X362-LIZS2U(/SL)

- X=4/6/8 MP, 2.8-12 mm
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- Arrayed Dual-Mic
- IP67, IK10



NEW

Smart Hybrid Light AcuSense 3.0

DS-2CD204362-LIZ2UY/SL(RB)

- 2.8/4 mm point-to-point zoom
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 40 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion



NEW

Smart Hybrid Light AcuSense 3.0

DS-2CD234362-LIZ2UY/SL(RB)

- X=4/6/8 MP
- 2.8/4 mm point-to-point zoom
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion



NEW

Smart Hybrid Light AcuSense 3.0

DS-2CD2T4362-LIZ2UY/SL(RB)

- X=4/6/8 MP
- 2.8/4 mm point-to-point zoom
- Strobe light & audio alarm
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 60 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion



NEW

Smart Hybrid Light AcuSense 3.0

DS-2CD2T4362-2(4)LIZ2UY

- X=4/6/8 MP
- 2.8/4 mm point-to-point zoom
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 60(-2I)/80(-4I) m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion

Pro Series Network Cameras with Powered by DarkFighter



NEW

Powered by DarkFighter + AcuSense 3.0

DS-2CD204663-IZ2UY/SL(RB)

- 2.8/4 mm point-to-point zoom
- Strobe light & audio alarm
- 4 MP, 0.001 lux
- IR light up to 40 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



NEW

Powered by DarkFighter + AcuSense 3.0

DS-2CD234663-IZS2UY/SL(RB)

- 2.8/4 mm point-to-point zoom
- Strobe light & audio alarm
- 4 MP, 0.001 lux
- IR light up to 30 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



NEW

Powered by DarkFighter + AcuSense 3.0

DS-2CD2T4663-IZS2UY/SL(RB)

- 2.8/4 mm point-to-point zoom
- Strobe light & audio alarm
- 4 MP, 0.001 lux
- IR light up to 60 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



NEW

Powered by DarkFighter + AcuSense 3.0

DS-2CD2T4663-2IZY

- 2.8/4 mm point-to-point zoom
- 4 MP, 0.001 lux
- IR light up to 60 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



NEW

Powered by DarkFighter + AcuSense 3.0

DS-2CD2T4663-4IZY

- 2.8/4 mm point-to-point zoom
- 4 MP, 0.001 lux
- IR light up to 80 m
- Arrayed Dual-Mic
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free Packaging



Powered by DarkFighter + AcuSense 3.0

DS-2CD20X662H-IU

- X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.0
- IR light up to 30 m
- IP67
- Eco-friendly Packaging



NETWORK CAMERAS

Pro Series Network Cameras with Powered by DarkFighter



Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD21X6G2H-ISU

- X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.0
- IR light up to 30 m
- IP67, IK10
- Eco-friendly Packaging



Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD23X6G2H-IU

- X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.0
- IR light up to 30 m
- IP67
- Eco-friendly Packaging



HIKVISION

Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD2TX6G2H-2I

- X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.0
- IR light up to 60 m
- IP67
- Eco-friendly Packaging



Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD2TX6G2H-4I

- X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.0
- IR light up to 80 m
- IP67
- Eco-friendly Packaging



Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD26X6G2HT-IZS

- 2.8-12 mm
- X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.2
- IR light up to 60 m
- IP67
- Eco-friendly Packaging



Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD26X6G2HT-IZS2U/SL(RB)

- Strobe light & audio alarm
- 2.8-12 mm, X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.2
- IR light up to 60 m
- Arrayed Dual-Mic
- IP67, Eco-friendly Packaging



Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD2746G2HT-IZS

- 2.8-12 mm
- X=4/8 MP
- 4 MP, 0.001 lux@F1.0
- 8 MP, 0.0008 lux@F1.2
- IR light up to 40 m
- IP67, IK10
- Eco-friendly Packaging



NEW
Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD2H46G2H-IZSY

- Innovative socket design
- 2.8-12 mm
- 4 MP, 0.001 lux@F1.0
- IR light up to 40 m
- IP67, IK10, NEMA 4X
- Eco-friendly & Tamper-free packaging



NEW
Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD2H66G2H-IZSY

- Innovative socket design
- 2.8-12 mm
- 6 MP, 0.0008 lux@F1.2
- IR light up to 40 m
- IP67, IK10, NEMA 4X
- Eco-friendly & Tamper-free packaging



NEW
Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD2H86G2H-IZSY

- Innovative socket design
- 2.8-12 mm
- 8 MP, 0.0008 lux@F1.2
- IR light up to 40 m
- IP67, IK10, NEMA 4X
- Eco-friendly & Tamper-free packaging



NEW
Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD2H46G2H-IZS2UY/SL(RB)

- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 4 MP, 0.001 lux@F1.0
- IR light up to 40 m
- IP67, IK10, NEMA 4X
- Eco-friendly & Tamper-free packaging



NEW
Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD2H66G2H-IZS2UY/SL(RB)

- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 6 MP, 0.0008 lux@F1.2
- IR light up to 40 m
- IP67, IK10, NEMA 4X
- Eco-friendly & Tamper-free packaging



NEW
Powered by **DarkFighter** + **AcuSense 3.0**

DS-2CD2H86G2H-IZS2UY/SL(RB)

- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 8 MP, 0.0008 lux@F1.2
- IR light up to 40 m
- IP67, IK10, NEMA 4X



NETWORK CAMERAS

Pro Series Network Cameras with PTRZ



PTRZ ColorVu 3.0

DS-2CD2747G2H-LIPTRZS2U/SL

- 5-axis motorized adjustment
- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 4 MP, 1/1.8" CMOS sensor
- 0.0028 lux@F1.2
- IR/white light up to 40 m
- 130 dB WDR
- IP66, IK10



PTRZ ColorVu 3.0

DS-2CD2767G2H-LIPTRZS2U/SL

- 5-axis motorized adjustment
- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 6 MP, 1/1.8" CMOS sensor
- 0.0028 lux@F1.2
- IR/white light up to 40 m
- 130 dB WDR
- IP66, IK10



PTRZ ColorVu 3.0

DS-2CD2787G2H-LIPTRZS2U/SL

- 5-axis motorized adjustment
- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 8 MP, 1/1.8" CMOS sensor
- 0.0028 lux@F1.2
- IR/white light up to 40 m
- 130 dB WDR
- IP66, IK10



PTRZ DarkFighter+

DS-2CD2746G2H-IPTRZS2U/SL

- 5-axis motorized adjustment
- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 4 MP, 1/1.8" CMOS sensor
- 0.0008 lux@F1.2
- IR light up to 40 m
- 120 dB WDR
- IP66, IK10



PTRZ DarkFighter+

DS-2CD2766G2H-IPTRZS2U/SL

- 5-axis motorized adjustment
- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 6 MP, 1/1.8" CMOS sensor
- 0.0008 lux@F1.2
- IR light up to 40 m
- 120 dB WDR
- IP66, IK10



PTRZ DarkFighter+

DS-2CD2786G2H-IPTRZS2U/SL

- 5-axis motorized adjustment
- Innovative socket design
- Strobe light & audio alarm
- 2.8-12 mm
- 8 MP, 1/1.8" CMOS sensor
- 0.0008 lux@F1.2
- IR light up to 40 m
- 120 dB WDR
- IP66, IK10

Pro Series Network Cameras with Dual-Lens



NEW
DarkFighter+ AcuSense 3.0

DS-2CD2346G3D-IZ2UY/SL(RB)

- 1 cable, 1 IP, 2 channels
- Innovative socket design
- 2.8/4 mm point-to-point zoom
- 4 MP, 0.001 lux
- IR light up to 30 m
- IP67, NEMA 4X anti-corrosion
- Eco-friendly & Tamper-free packaging



NEW
Smart Hybrid Light AcuSense 3.0

DS-2CD2343G2D-LIZ2UY/SL(RB)

- 1 cable, 1 IP, 2 channels
- Innovative socket design
- 2.8/4 mm point-to-point zoom
- 4 MP, 0.005 lux
- IR/white light up to 30 m
- IP67, NEMA 4X anti-corrosion



Dual-IR LED Lighting ColorVu Technology

DS-2CD23X7G2P-LSU/SL

- 180° panoramic view
- Strobe light & audio alarm
- X=4/6/8 MP
- 0.0005 lux@F1.0
- White light up to 30 m
- IP67



Dual-IR LED Lighting ColorVu Technology

DS-2CD2TX7G2P-LSU/SL

- 180° panoramic view
- Strobe light & audio alarm
- X=4/6/8 MP
- 0.0005 lux@F1.0
- White light up to 40 m
- IP67



Dual-IR LED Lighting **DarkFighter+**

DS-2CD23X6G2P-ISU/SL

- 180° panoramic view
- Strobe light & audio alarm
- X=4/6 MP
- 0.003 lux@F1.6
- IR light up to 30 m
- IP67



Dual-IR LED Lighting **DarkFighter+**

DS-2CD2TX6G2P-ISU/SL

- 180° panoramic view
- Strobe light & audio alarm
- X=4/6 MP
- 0.003 lux@F1.6
- IR light up to 40 m
- IP67



NETWORK CAMERAS

Pro Series Network Cameras with Dual-Lens



NEW

Smart Hybrid Light Motion Detection 2.0

DS-2SE2C200MWG-E/12

- Mini TandemVu
- Strobe light & audio alarm
- 2 MP
- IP66
- Static channel: 2.8 mm, IR/white light up to 30 m
- PT channel: 6/8 mm, IR light up to 30 m



NEW

Smart Hybrid Light Motion Detection 2.0

DS-2SE2C400MWG-E/14

- Mini TandemVu
- Strobe light & audio alarm
- 4 MP
- IP66
- Static channel: 2.8 mm, IR/white light up to 30 m
- PT channel: 6/8 mm, IR light up to 30 m

HIKVISION®

Special Pro Series Network Cameras



AcuSense 3.0

DS-2CD2955G0-ISU

- 1.05 mm
- Horizontal/vertical/diagonal FOV: 180°
- 5 MP
- 0.017 lux@F2.25
- IR light up to 8 m
- 120 dB



Powered by DarkFighter+ AcuSense 3.0

DS-2CD21X6G2-IMS

- Built-in Micro HDMI
- HDMI output: 50/60 Hz
- X=2/8 MP
- 2 MP, 0.002 lux@F1.4
- 8 MP, 0.003 lux@F1.6
- IR light up to 30 m
- 130 dB, IK10



AcuSense 3.0

DS-2CD2EX362-U

- Recessed installation
- X=2/4 MP
- 0.005 lux@F1.6
- Tilt: 0° to 75°
- 120 dB WDR

Value Series Network Cameras with ColorVu 3.0



NEW

ColorVu 3.0 Motion Detection 3.0

DS-2CD10X7G3H-LIUF/SL(RB)

- X=2/4/6/8 MP
- Strobe light & audio alarm
- HiKAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 40 m
- IP67
- Two-way audio



NEW

ColorVu 3.0 Motion Detection 3.0

DS-2CD13X7G3H-LIUF/SL(RB)

- X=2/4/6/8 MP
- Strobe light & audio alarm
- HiKAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 40 m
- IP67
- Two-way audio



NEW

ColorVu 3.0 Motion Detection 3.0

DS-2CD1TX7G3H-LIUF/SL(RB)

- X=2/4/6/8 MP
- Strobe light & audio alarm
- HiKAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 50 m
- IP67
- Two-way audio



NEW

ColorVu 3.0 Motion Detection 3.0

DS-2CD1BX7G3H-LIUF/SL(RB)

- X=2/4/6/8 MP
- Strobe light & audio alarm
- HiKAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 50 m
- IP67
- Two-way audio



NEW

ColorVu 3.0 Motion Detection 3.0

DS-2CD10X7G3H-LIUF

- X=2/4/6/8 MP
- HiKAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 40 m
- IP67



NEW

ColorVu 3.0 Motion Detection 3.0

DS-2CD13X7G3H-LIUF

- X=2/4/6/8 MP
- HiKAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 40 m
- IP67



NETWORK CAMERAS

Value Series Network Cameras with ColorVu 3.0



NEW

ColorVu 3.0 Motion Detection 3.0

DS-2CD1TX7G3H-LIUF

- X=2/4/6/8 MP
- HikAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 50 m
- IP67



NEW

ColorVu 3.0 Motion Detection 3.0

DS-2CD1BX7G3H-LIUF

- X=2/4/6/8 MP
- HikAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 50 m
- IP67



NEW

ColorVu 3.0 Motion Detection 3.0

DS-2CD11X7G3H-LIUF

- X=2/4/6/8 MP
- HikAI-ISP
- 4 MP, 0.0001 lux@F1.0
- IR/white light up to 40 m
- IP67, IK08

Value Series Network Cameras with Dual-Lens



ColorVu Technology Dual-Lens 2.0 HD Imaging

DS-2CD1367G2HP-LIUF/SL(RB)

- 180° panoramic view
- Strobe light & audio alarm
- Two-way audio
- 6 MP, 0.001 lux@F1.0
- IR/white light up to 30 m
- IP67



ColorVu Technology Dual-Lens 2.0 HD Imaging

DS-2CD1T67G2HP-LIUF/SL(RB)

- 180° panoramic view
- Strobe light & audio alarm
- Two-way audio
- 6 MP, 0.001 lux@F1.0
- IR/white light up to 30 m
- IP67



Dual-Lens 2.0 HD Imaging Two-Way Audio

DS-2CD1363G2P-LIUF/SL

- 180° panoramic view
- Strobe light & audio alarm
- 6 MP, 1/2.5" CMOS sensor
- 0.005 lux@F1.6
- IR/white light up to 30 m
- 120 dB WDR
- IP67



Dual-Lens 2.0 HD Imaging Two-Way Audio

DS-2CD1383G2P-LIUF/SL

- 180° panoramic view
- Strobe light & audio alarm
- 8 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- 120 dB WDR
- IP67



Dual-Lens 2.0 HD Imaging Two-Way Audio

DS-2CD1T63G2P-LIUF/SL

- 180° panoramic view
- Strobe light & audio alarm
- 6 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- 120 dB WDR
- IP67



Dual-Lens 2.0 HD Imaging Two-Way Audio

DS-2CD1T83G2P-LIUF/SL

- 180° panoramic view
- Strobe light & audio alarm
- 8 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- 120 dB WDR
- IP67

Value Series Network Cameras with ColorVu 2.0



ColorVu Technology Motion Detection 2.0

DS-2CD10X7G2H-LIUF/SL(RB)

- X=2/4/6 MP
- Strobe light & audio alarm
- Two-way audio
- 4 MP, 0.001 lux@F1.0
- IR/white light up to 30 m
- IP67



ColorVu Technology Motion Detection 2.0

DS-2CD13X7G2H-LIUF/SL(RB)

- X=2/4/6 MP
- Strobe light & audio alarm
- Two-way audio
- 4 MP, 0.001 lux@F1.0
- IR/white light up to 30 m
- IP67



ColorVu Technology Motion Detection 2.0

DS-2CD1TX7G2H-LIUF/SL(RB)

- X=2/4/6 MP
- Strobe light & audio alarm
- Two-way audio
- 4 MP, 0.001 lux@F1.0
- IR/white light up to 50 m
- IP67



NETWORK CAMERAS

Value Series Network Cameras with ColorVu 2.0

HIKVISION



DS-2CD1BX762H-LIUF/SL(RB)

- Strobe light & audio alarm
- Two-way audio
- 4 MP, 0.001 lux@F1.0
- IR/white light up to 50 m
- IP67



DS-2CD11X762H-LIUF

- X=2/4/6 MP
- 4 MP, 0.001 lux@F1.0
- IR/white light up to 30 m
- Built-in Mic
- IP67, IK08

Value Series Network Cameras with Smart Hybrid Light



DS-2CD10X362-LIUF/SL

- X=2/4/6/8 MP
- Strobe light & audio alarm
- 4 MP, 1/3"CMOS sensor
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- DWDR
- IP67



DS-2CD13X362-LIUF/SL

- X=2/4/6/8 MP
- Strobe light & audio alarm
- 4 MP, 1/3"CMOS sensor
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- DWDR
- IP67



DS-2CD1TX362-LIUF/SL

- X=2/4/6/8 MP
- Strobe light & audio alarm
- 4 MP, 1/3"CMOS sensor
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 50 m
- DWDR
- IP67



DS-2CD1BX362-LIUF/SL

- X=2/4 MP
- Strobe light & audio alarm
- 4 MP, 1/3"CMOS sensor
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 60 m
- DWDR
- IP67



DS-2CD11X362-LIUF

- X=2/4/6/8 MP
- 4 MP, 1/3"CMOS sensor
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- 120 dB WDR
- IP67, IK08



DS-2CD16X362-LIZSU/SL

- X=2/4/6 MP
- 2.8-12 mm
- 4 MP, 1/3"CMOS sensor
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 50 m
- DWDR
- IP67



DS-2CD17X362-LIZSU

- X=2/4/6 MP
- 2.8-12 mm
- 4 MP, 1/3"CMOS sensor
- 4 MP, 0.005 lux@F1.6
- IR/white light up to 30 m
- DWDR
- IP67, IK10



NETWORK CAMERAS

Value Series PT Network Cameras



Motion 2.0
Two-Way Audio

DS-2DE2C200MWG-E

- Auto Tracking Lite
- Pan: 0°-345°, tilt: 0°-80°
- Smart hybrid light
- 2 MP, 0.01 lux@F2.0
- IR/white light up to 30 m
- IP66



Motion 2.0
Two-Way Audio

DS-2DE2C400MWG-E

- Auto Tracking Lite
- Pan: 0°-345°, tilt: 0°-80°
- Smart hybrid light
- 4 MP, 0.01 lux@F2.0
- IR/white light up to 30 m
- IP66



Motion 2.0
Two-Way Audio

DS-2DE2C600MWG-E

- Auto Tracking Lite
- Pan: 0°-345°, tilt: 0°-80°
- Smart hybrid light
- 6 MP, 0.001 lux@F1.6
- IR/white light up to 30 m
- IP66

Value Series PTZ Cameras



NEW

AcuSense
Technology

DS-2DE2A404IWG1-E

- 4 MP@25/30 fps, 4x optical zoom
- Pan: 0° to 355°, tilt: 0° to 90°
- IR range: 20 m
- Built-in microphone and speaker
- Power-over-Ethernet
- IP66, IK10



NEW

AcuSense
Technology

DS-2DE2A404IWG1-E/W

- 4 MP@25/30 fps, 4x optical zoom
- Pan: 0° to 355°, tilt: 0° to 90°
- IR range: 20 m
- Built-in microphone and speaker
- Wi-Fi communication
- Power-over-Ethernet
- IP66, IK10



NEW

ColorVu AcuSense
Technology

DS-2DE3A400BW-DE

- 4 MP@25/30 fps, 2.8 mm/4 mm lens
- Pan: 0° to 350°, tilt: 0° to 90°
- White light range: 30 m
- Strobe light and audio alarm
- Built-in microphone and speaker
- Power-over-Ethernet
- IP66



ColorVu AcuSense
Technology

DS-2DE3A404IWG-E

- 4 MP@25/30 fps, 2.8 mm/4 mm lens
- Pan: 0° to 350°, tilt: 0° to 90°
- White light range: 30 m
- Strobe light and audio alarm
- Built-in microphone and speaker
- Power-over-Ethernet
- IP66



TandemVu AcuSense
Technology

DS-2SE3C404MWG-E/14

- Panoramic: 4 MP@25/30 fps, 2.8 mm
Tilt: 7°-17°
- PTZ: 4 MP@25/30 fps, 4x optical zoom
Pan: 0° to 350°, tilt: -5° to 90°
- Smart linkage between bullet camera and PTZ
channels for Auto Tracking Lite
- Built-in microphone and speaker
- White light (30 m) and IR light (40 m)
- IP66



NEW

TandemVu AcuSense
Technology

DS-2SE3C404MWG-4G/14

- Panoramic: 4 MP@25/30 fps, 2.8 mm,
tilt: 7°-17°
- PTZ: 4 MP@25/30 fps, 4x optical zoom
Pan: 0° to 350°, tilt: -5° to 90°
- Smart linkage between bullet camera and PTZ
channels for Auto Tracking Lite
- Built-in microphone and speaker
- White light (30 m) and IR light (40 m)
- 4G communication
- IP66

NETWORK CAMERAS

Pro Series PTZ Cameras



AcuSense
Technology

DS-2DE3C210IX-DE(C1)(0-STD)(T5)

- 1/2.8" 2 MP CMOS, 10x optical zoom
- 2 MP @25/30 fps
- AcuSense, people counting
- Pan: 360° (continuous rotation)
tilt: -15° to 90°
- Strobe light and audio alarm
- 50 m IR
- IP66



NEW

AcuSense
Technology

DS-2DE4425IWG1-E

- 1/2.8" 4 MP CMOS, 25x optical zoom
- SharpMotion AI-ISP
- 4 MP@25/30 fps
- Self-learning rapid focus
- Pan: 360° (continuous rotation) tilt: -15° to 90°
- 100 m IR
- IP67



NEW
HIKVISION

AcuSense
Technology

DS-2DE4825IWG1-E

- 1/2.8" 4 MP CMOS, 25x optical zoom
- SharpMotion AI-ISP
- 4 MP@25/30 fps
- Self-learning rapid focus
- Pan: 360° (continuous rotation), tilt: -15° to 90°
- 100 m IR
- IP67



NEW

AcuSense
Technology

DS-2DE4A425IWG1-E

- 1/2.8" 4 MP CMOS, 25x optical zoom
- SharpMotion AI-ISP
- 4 MP@25/30 fps
- Auto tracking 2.0
- Self-learning rapid focus
- Pan: 360° (continuous rotation), tilt: -5° to 90°
- 50 m IR
- IP67



NEW

TandemVu Audio2C
AcuSense
Technology

DS-2SE4C425MWG1-E/14

- Panoramic: 4 MP@25/30 fps, 2.8 mm lens,
Tilt: 9°-21°
- PTZ: 4 MP@25/30 fps, 25x optical zoom,
Pan: 360° (continuous rotation), tilt: -15° to 90°
- Smart linkage between bullet and PTZ channels
for auto tracking
- White strobe light and audio alarm
- Built-in microphone and speaker
- White light (30 m) and IR (100 m)
- IP67



NEW

TandemVu AcuSense
Technology

DS-2SE4C425MWG-E/26

- Panoramic: 2 x 1/2.5" CMOS, 6 MP, 180° FOV
- PTZ: 1/2.8" 4 MP CMOS, 25x optical zoom
- Pan: 360° (continuous rotation),
tilt: -15° to 90°
- 4 MP@25/30 fps
- Smart linkage between bullet and PTZ
channels for auto tracking
- 30 m white light and 100 m IR
- IP66



NEW

TandemVu AcuSense
Technology

DS-2SE4C425MWG1-E/RB/14

- Panoramic: 4 MP@25/30 fps, 2.8 mm,
Tilt: 9°-21°
- PTZ: 4 MP@25/30 fps, 25x optical zoom,
Pan: 360° (continuous rotation), tilt: -15° to 90°
- Smart linkage between bullet and PTZ channels
for auto tracking
- Red & blue strobe light and audio alarm
- Built-in microphone and speaker
- White light (30 m) and IR (100 m)
- IP67



NEW

TandemVu AcuSense
Technology

DS-2SE4C425MWG1-4G/14

- Panoramic: 4 MP@25/30 fps, 2.8 mm,
Tilt: 9°-21°
- PTZ: 4 MP@25/30 fps, 25x optical zoom,
Pan: 360° (continuous rotation), tilt: -15° to 90°
- Smart linkage between bullet and PTZ channels
for auto tracking
- White strobe light and audio alarm
- Built-in microphone and speaker
- White light (30 m) and IR (100 m)
- 4G communication
- IP67



NEW

TandemVu AcuSense
Technology

DS-2SE4C425MWG1-E/14 (Black)

- Panoramic: 4 MP@25/30 fps, 2.8 mm, Tilt: 9°-
21°
- PTZ: 4 MP@25/30 fps, 25x optical zoom, Pan: 360°
(continuous rotation), tilt: -15° to 90°
- AcuSense
- Smart linkage between bullet and PTZ channels
for auto tracking
- White strobe light and audio alarm
- Built-in microphone and speaker
- White light (30 m) and IR (100 m)
- IP67



NEW

AcuSense
Technology

DS-2DE5432IWG1-E

- 1/2.8" 4 MP CMOS, 32x optical zoom
- SharpMotion AI-ISP
- 4 MP@25/30 fps
- Auto Tracking 2.0
- Self-learning rapid focus
- Pan: 360° (continuous rotation), tilt: -15° to 90°
- IR range: 150 m
- IP67



NEW

AcuSense
Technology

DS-2DE7A432IWG1-E

- 1/1.8" 4 MP CMOS, 32x optical zoom
- SharpMotion AI-ISP
- 4 MP@25/30 fps
- Auto Tracking 2.0
- White strobe light and audio alarm
- Self-learning rapid focus
- Pan: 360° (continuous rotation), tilt: -15° to 90°
- IR range: 200 m
- IP67, IK10



NEW

AcuSense
Technology

DS-2DE7A825IWG1-E

- 1/1.8" 8 MP CMOS, 25x optical zoom
- SharpMotion AI-ISP
- 8 MP@25/30 fps
- Auto Tracking 2.0
- White strobe light and audio alarm
- Self-learning rapid focus
- Pan: 360° (continuous rotation), tilt: -15° to 90°
- IR range: 200 m
- IP67, IK10



CABLE-FREE SERIES

EasyLink Wi-Fi NVS Kit



NEW

NKS4223WBTH

2 MP Wi-Fi Bullet Camera
3 MP Wi-Fi PT Turret Camera
4-ch NVS

- Smart Hybrid Light
- Two-way audio
- Smart Tracking (PT Camera)
- One-tap Privacy Mode (PT Camera)
- 2 Micro SD card slots, up to 512 GB each
- 4-ch IP video input



NEW

NKS422WBH

2 MP Wi-Fi Bullet Camera x2
4-ch NVS

- Smart Hybrid Light
- Two-way audio
- 2 Micro SD card slots, up to 512 GB each
- 4-ch IP video input
- All cameras can be linked to NVS simultaneously
- Secure and integrated video storage in NVS



NEW

NKS422WBPH

2 MP Mini PT Camera
2 MP Wi-Fi Bullet Camera
4-chl NVS

- Smart Hybrid Light
- Two-way audio
- 2 Micro SD card slots, up to 512 GB for each
- 4-ch IP video input
- All cameras can be linked to NVS simultaneously
- Secure and integrated video storage in NVS



NEW

NKS4245WBTH

4 MP Wi-Fi Bullet Camera
5 MP Wi-Fi PT Turret Camera
4-ch NVS

- Smart Hybrid Light
- Two-way audio
- Smart Tracking (PT Camera)
- One-tap Privacy Mode (PT Camera)
- 2 Micro SD card slots, up to 512 GB each
- 4-ch IP video input



NEW

NKS424WBH

4 MP Wi-Fi Bullet Camera x2
4-ch NVS

- Smart Hybrid Light
- Two-way audio
- 2 Micro SD card slots, up to 512 GB each
- 4-ch IP video input
- All cameras can be linked to NVS simultaneously
- Secure and integrated video storage in NVS



NEW

NKS424WBPH

4 MP Mini PT Camera
4 MP Wi-Fi Bullet Camera
4-ch NVS

- Smart Hybrid Light
- Two-way audio
- 2 Micro SD card slots, up to 512 GB for each
- 4-ch IP video input
- All cameras can be linked to NVS simultaneously
- Secure and integrated video storage in NVS



NEW

NK842WBH

2 MP Wi-Fi Bullet Camera x4
8-ch Wi-Fi NVR x1

- 8-channel IP video input
- Up to 4 x 4 MP / 8 x 1080p decoding capacity
- 4K HDMI local output
- 1 SATA interface, up to 8 TB for each HDD
- Smart Hybrid Light
- Motion Detection 2.0
- Water and dust resistant (IP66)



NEW

NK844WBH

4 MP Wi-Fi Bullet Camera x4
8-ch Wi-Fi NVR x1

- 8-channel IP video input
- Up to 4 x 4 MP / 8 x 1080p decoding capacity
- 4K HDMI local output
- 1 SATA interface, up to 8 TB for each HDD
- Smart Hybrid Light
- Motion Detection 2.0
- Water and dust resistant (IP66)



NEW

NK844WDH

4 MP Wi-Fi Dome Camera x4
8-ch Wi-Fi NVR x1

- 8-channel IP video input
- Up to 4 x 4 MP / 8 x 1080p decoding capacity
- 4K HDMI local output
- 1 SATA interface, up to 8 TB for each HDD
- Smart Hybrid Light
- People Detection
- Water and dust resistant (IP66)

CABLE-FREE SERIES

EasyLink Wi-Fi Cameras



NEW

Wi-Fi 6 Motion 2.0

DS-2CFW06-P

- 3 MP+3 MP, 1/2.5"CMOS
- 180° Field of view
- 0.005 lux@F1.6
- IR/white light up to 30 m
- Two-way audio
- IP67



NEW

Wi-Fi 6 Motion 2.0

DS-2CFW06-D

- 3 MP+3 MP, 1/2.8"CMOS
- Panoramic and detail view
- Smart Tracking
- One-tap Privacy Mode
- IR/white light up to 10 m
- Two-way audio

HIKVISION®

Pro Solar-powered Security Camera Setup



NEW

AOV

DS-2CFS04/4G

- 4 MP
- 0.005 lux@F1.6
- IR/white light up to 30 m
- Motion Detection 2.0
- Two-way audio
- IP 66



NEW

AOV

DS-2CFSP4/4G

- 4 MP
- 0.005 lux@F1.6
- Smart Tracking
- IR/white light up to 30 m
- Motion Detection 2.0
- Two-way audio
- IP 66



NEW

AOV

DS-2CFSP8-D/4G

- 4 MP+4 MP
- 0.005 lux@F1.6
- Smart Tracking
- IR/white light up to 30 m
- Motion Detection 2.0
- Two-way audio



THERMAL

HeatPro Series Thermal Cameras



NEW

HM-TD2618/60/T1A

- Thermal: 160 x 120@12 μm, NETD < 25 mk
- Optical: 5 MP
- 100 m perimeter protection
- Smart Hybrid Light and audible warning
- IP67, IK10



NEW

HM-TD2628/61/T3A

- Thermal: 256 x 192 @12 μm, NETD < 25 mk
- Optical: 5 MP
- 120 m perimeter protection
- GUANLAN Large-Scale AI Model
- Smart Hybrid Light and audible warning
- IP67, IK10



NEW

HM-TD1218/60/T1A

- Thermal: 160 x 120@12 μm, NETD < 25 mk
- Optical: 5 MP
- 70 m perimeter protection
- Smart Hybrid Light and audible warning
- IP67



NEW

HM-TD1228/61/T3A

- Thermal: 256 x 192@12 μm, NETD < 25 mk
- Optical: 5 MP
- 84 m perimeter protection
- GUANLAN Large-Scale AI Model
- Smart Hybrid Light and audible warning
- IP67



NEW

HM-TD2628T/61/T3A

- Thermal: 256 x 192@12 μm, NETD < 25 mk
- Optical: 5 MP
- Anomaly temperature detection and smoke detection with GUANLAN Large-Scale AI Model
- -20 - 650°C temperature range with ± 2 °C or ± 2% accuracy
- Smart Hybrid Light and audible warning
- IP67, IK10



NEW

HM-TD1228T/61/T3A

- Thermal: 256 x 192@12 μm, NETD < 25 mk
- Optical: 5 MP
- Anomaly temperature detection and smoke detection with GUANLAN Large-Scale AI Model
- -20 - 650 °C temperature range with ± 2 °C or ± 2% accuracy
- Smart Hybrid Light and audible warning
- IP67



HM-TD3028T/Q(B)

- 256x192@12 μm, NETD < 40 mk; Optical 4Mp
- 90°/50° HFOV
- Anomaly temperature detection -20 - 550 °C temperature range with ± 2 °C or ± 2% accuracy
- Smart whitelight supplement
- IP67



HM-TD3118T/Q

- 160 x 120@12 μm, NETD < 40 mk
- 110°/90° HFOV
- Anomaly temperature detection -20 - 550 °C temperature range with ± 2 °C or ± 2% accuracy
- IP67



HM-TD1017

- 160 x 120@17 μm, NETD < 50 mk
- 110°/90° HFOV
- People number exception and people counting
- Healthy tracking for anomaly behavior detection
- 2.4 GHz Wi-Fi
- Tpye-C and PoE



HM-TD1018

- 160 x 120@12 μm, NETD < 50 mk
- 90° HFOV
- People number exception and people counting
- Falling detection based on radar
- PoE



DS-2TD4228/S2

- 256 x 192@12 μm, NETD < 35 mk;
- Optical 4 MP, 4.8-153 mm, 32x
- Perimeter protection and anomaly temperature detection
- Fire and smoke detection -20 - 150 °C temperature range with ± 8 °C accuracy
- Linkage smart tracking



DS-2TD4228T/S2


- 256 x 192@12 μm, NETD < 35 mk;
- Optical 4 MP, 4.8-153 mm, 32x
- Perimeter protection and anomaly temperature detection
- Fire and smoke detection
- -20-550 °C temperature range with ± 2 °C or ± 2% accuracy
- Linkage smart tracking



AcuSeek by Guanlan AI Model




AcuSeek

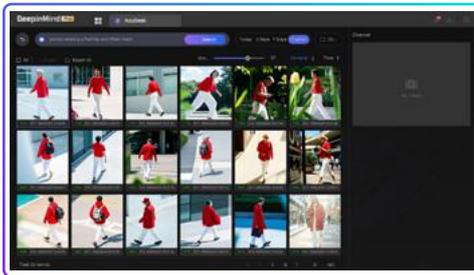

Search by Text


AcuSeek NVR supports natural-language-based video/image retrieval applications, allowing second-level retrieval on target images by inputting phrases or words.

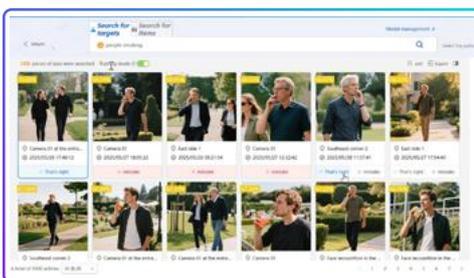

Manual Online Optimization

Allowing for manual correction of search results when an error is identified.

Note: Only supported by New DeepinMind NVR and Fusion Server Ultra

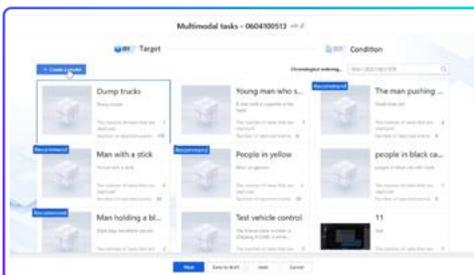

Self-Defined Application by Text

Supports text description of object features, quick initiation of warning tasks, and immediate alarm triggering once the object appears.

Note: Only supported by Fusion Server Ultra

NVR

I/VPro Series



NEW

AcuSeek

DS-7608NXI-I2(8P)/VPro

- 8-ch IP video input; /P: PoE
- Up to 96 Mbps incoming bandwidth
- Up to 2 × 32 MP/8 × 8 MP/16 × 4 MP/32 × 1080p decoding capability
- 2 SATA interface, up to 20 TB for each HDD
- Power by Guanlan Large-Scale AI Model
- Full Channel AcuSeek with Acusense IPC
- Full Channel AcuSearch with Acusense IPC



NEW

AcuSeek

DS-7616NXI-I2(8P)/VPro

- 16-ch IP video input; /P: PoE
- Up to 192 Mbps incoming bandwidth
- Up to 2 × 32 MP/8 × 8 MP/16 × 4 MP/32 × 1080p decoding capability
- 2 SATA interface, up to 20 TB for each HDD
- Power by Guanlan Large-Scale AI Model
- Full Channel AcuSeek with Acusense IPC
- Full Channel AcuSearch with Acusense IPC



NEW

AcuSeek

DS-7716NXI-I4(8P)/VPro

- 16-ch IP video input; /P: PoE
- Up to 192 Mbps incoming bandwidth
- Up to 2 × 32 MP/8 × 8 MP/16 × 4 MP/32 × 1080p decoding capability
- 4 SATA interface, up to 20 TB for each HDD
- Power by Guanlan Large-Scale AI Model
- Full Channel AcuSeek with Acusense IPC
- Full Channel AcuSearch with Acusense IPC



NEW

AcuSeek

DS-7732NXI-I4(16P)/VPro

- 32-ch IP video input; /P: PoE
- Up to 384 Mbps incoming bandwidth
- Up to 2 × 32 MP/8 × 8 MP/16 × 4 MP/32 × 1080p decoding capability
- 4 SATA interface, up to 20 TB for each HDD
- Power by Guanlan Large-Scale AI Model
- Full Channel AcuSeek with Acusense IPC
- Full Channel AcuSearch with Acusense IPC

I Series with AcuSense(E)



NEW

AcuSense
Technology

DS-7608NXI-I2(8P)/S(E)

- 8-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 2 × 32 MP/8 × 8 MP/16 × 4 MP/32 × 1080p decoding capability
- 2 SATA interfaces, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 8-ch Motion Detection 2.0
- Up to 4-ch perimeter protection
- Up to 4-ch facial recognition for video stream



NEW

AcuSense
Technology

DS-7616NXI-I2(16P)/S(E)

- 16-ch IP video input; /P: PoE
- Up to 160 Mbps incoming bandwidth
- Up to 2 × 32 MP/8 × 8 MP/16 × 4 MP/32 × 1080p decoding capability
- 2 SATA interfaces, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 16-ch Motion Detection 2.0
- Up to 4-ch perimeter protection
- Up to 4-ch facial recognition for video stream



NEW

AcuSense
Technology

DS-7732NXI-I4(16P)/S(E)

- 32-ch IP video input; /P: PoE
- Up to 256 Mbps incoming bandwidth
- Up to 2 × 32 MP/8 × 8 MP/16 × 4 MP/32 × 1080p decoding capability
- 4 SATA interfaces, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 32-ch Motion Detection 2.0
- Up to 4-ch perimeter protection
- Up to 4-ch facial recognition for video stream

K series with AcuSense



NEW

AcuSense
Technology

DS-7604NXI-K1(4P)(E)

- 4-ch IP video input; /P: PoE
- Up to 40 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 10 × 4 MP / 20 × 1080p decoding capacity
- 1 SATA interface, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 2 channels for perimeter protection
- Up to 4 channels facial recognition for picture stream
- Up to 4 channels Motion Detection 2.0



NEW

AcuSense
Technology

DS-7608NXI-K1(8P)(E)

- 8-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 10 × 4 MP / 20 × 1080p decoding capacity
- 1 SATA interface, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 2 channels perimeter protection
- Up to 8 channels facial recognition for picture stream
- Up to 8 channels Motion Detection 2.0



NEW

AcuSense
Technology

DS-7608NXI-K2(8P)(E)

- 8-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 10 × 4 MP / 20 × 1080p decoding capacity
- 2 SATA interfaces, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 2 channels perimeter protection
- Up to 8 channels facial recognition for picture stream
- Up to 8 channels Motion Detection 2.0



NVR

K series with AcuSense

HIKVISION



NEW

AcuSense
Technology

DS-7616NXI-K2(/16P)(E)

- 16-ch IP video input; /P: PoE
- Up to 160 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 10 × 4 MP / 20 × 1080p decoding capacity
- 2 SATA interfaces, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 2 channels perimeter protection
- Up to 8 channels facial recognition for picture stream
- Up to 16 channels Motion Detection 2.0



NEW

AcuSense
Technology

DS-7732NXI-K4(/16P)(E)

- 32-ch IP video input; /P: PoE
- Up to 256 Mbps incoming bandwidth
- Up to 3 × 12 MP / 5 × 8 MP / 10 × 4 MP / 20 × 1080p decoding capacity
- 4 SATA interfaces, up to 16 TB for each HDD
- Full Channel AcuSearch with Acusense IPC
- Up to 2 channels perimeter protection
- Up to 8 channels facial recognition for picture stream
- Up to 32 channels Motion Detection 2.0

76Q Series



NEW

DS-7604NI-Q1(/4P)(E)

- 4-ch IP video input; /P: PoE
- Up to 40 Mbps incoming bandwidth
- Up to 2 × 8 MP / 4 × 4 MP / 8 × 1080p decoding capacity
- 1 SATA interface, up to 8 TB
- 1-ch Motion Detection 2.0



NEW

DS-7608NI-Q1(/8P)(E)

- 8-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 2 × 8 MP / 4 × 4 MP / 8 × 1080p decoding capacity
- 1 SATA interface, up to 8 TB
- Up to 4-ch Motion Detection 2.0



NEW

DS-7608NI-Q2(/8P)(E)

- 16-ch IP video input; /P: PoE
- Up to 80 Mbps incoming bandwidth
- Up to 2 × 8 MP / 4 × 4 MP / 8 × 1080p decoding capacity
- 2 SATA interface, up to 8 TB
- Up to 4-ch Motion Detection 2.0



NEW

DS-7616NI-Q2(/8P)(E)

- 4-ch IP video input; /P: PoE
- Up to 40 Mbps incoming bandwidth
- Up to 2 × 8 MP / 4 × 4 MP / 8 × 1080p decoding capacity
- 1 SATA interface, up to 8 TB
- 1-ch Motion Detection 2.0

71Q Series



DS-7104NI-Q1(/4P)(D)

- 4-ch IP video input; /P: PoE
- Up to 40 Mbps incoming bandwidth
- Up to 1 × 6 MP / 2 × 4 MP / 4 × 1080p decoding capacity
- 1 SATA interface, up to 6 TB



DS-7108NI-Q1(D)

- 8-ch IP video input
- Up to 60 Mbps incoming bandwidth
- Up to 1 × 6 MP / 2 × 4 MP / 4 × 1080p decoding capacity
- 1 SATA interface, up to 6 TB



DS-7108NI-Q1/8P(D)

- 8-ch IP video input; /P: PoE
- Up to 60 Mbps incoming bandwidth
- Up to 1 × 6 MP / 2 × 4 MP / 4 × 1080p decoding capacity
- 1 SATA interface, up to 6 TB



TURBO HD

ColorVu Cameras with Two-way Audio



NEW

ColorVu Two-way Audio

DS-2CE10DF0T-LP(X)TS
DS-2CE10KF0T-LP(X)TS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



NEW

ColorVu Two-way Audio

DS-2CE10DF0T-LP(X)TS
DS-2CE10KF0T-LP(X)TS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



NEW

ColorVu Two-way Audio

DS-2CE12DF0T-L(X)TS
DS-2CE12KF0T-L(X)TS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



NEW

ColorVu Two-way Audio

DS-2CE19DF0T-L(X)TS
DS-2CE19KF0T-L(X)TS

- 2 MP, 3K, 2.8 mm, 3.6 mm, 6mm fixed focal lens
- 0.001 lux@F1.0
- Two-way audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



NEW

ColorVu Two-way Audio

DS-2CE72DF0T-LP(X)TS
DS-2CE72KF0T-LP(X)TS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm



NEW

ColorVu Two-way Audio

DS-2CE72DF0T-L(X)TS
DS-2CE72KF0T-L(X)TS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Two-way audio
- Smart Hybrid Light
- IP67
- -X: strobe light and audio alarm

Smart Hybrid Light Cameras with Two-way Audio



NEW

Smart Hybrid Light Two-way Audio

DS-2CE16D0T-LP(X)TS
DS-2CE16K0T-LP(X)TS
DS-2CE16U0T-LP(X)TS

- 2 MP, 3K, 4K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- IP67
- (X) models: strobe light and audio alarm



NEW

Smart Hybrid Light Two-way Audio

DS-2CE16D0T-L(X)TS
DS-2CE16K0T-L(X)TS
DS-2CE16U0T-L(X)TS

- 2 MP, 3K, 4K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- IP67
- (X) models: strobe light and audio alarm



NEW

Smart Hybrid Light Two-way Audio

DS-2CE17D0T-L(X)TS
DS-2CE17K0T-L(X)TS
DS-2CE17U0T-L(X)TS

- 2 MP, 3K, 4K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- IP67
- (X) models: strobe light and audio alarm



NEW

Smart Hybrid Light Two-way Audio

DS-2CE19D0T-L(X)TS
DS-2CE19K0T-L(X)TS
DS-2CE19U0T-L(X)TS

- 2 MP, 3K, 4K resolution
- 2.8 mm, 3.6 mm, 6mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- IP67
- (X) models: strobe light and audio alarm



NEW

Smart Hybrid Light Two-way Audio

DS-2CE78D0T-LP(X)TS
DS-2CE78K0T-LP(X)TS
DS-2CE78U0T-LP(X)TS

- 2 MP, 3K, 4K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- IP67
- (X) models: strobe light and audio alarm



NEW

Smart Hybrid Light Two-way Audio

DS-2CE78D0T-L(X)TS
DS-2CE78K0T-L(X)TS
DS-2CE78U0T-L(X)TS

- 2 MP, 3K, 4K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Two-way audio
- Smart Hybrid Light
- IP67
- (X) models: strobe light and audio alarm



TURBO HD

Smart Hybrid Light Cameras with ColorVu



DS-2CE10DF3T-L(P)F

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE12DF3T-LFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE50DF3T-VPLFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE70DF3T-LMFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE70DF3T-LPFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)



DS-2CE72DF3T-LFS

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE10KF3T-LS(YE)

- 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Smart Hybrid Light
- IP67
- -E: PoC
- -Y: Anti-corrosion (NEMA4X)



DS-2CE12KF3T-LS(YE)

- 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Smart Hybrid Light
- IP67
- -E: PoC
- -Y: Anti-corrosion design (NEMA4X)



DS-2CE72KF3T-LS(YE)

- 2.8 mm, 3.6 mm fixed focal lens
- 0.0005 lux@F1.0
- Smart Hybrid Light
- IP67
- -E: PoC
- -Y: Anti-corrosion design (NEMA4X)



DS-2CE12KF3TP-DLS

- 2 fixed focal lens, 180° FOV
- 0.0005 lux@F1.0
- Smart Hybrid Light
- IP67



DS-2CE72KF3TP-DLS

- 2 fixed focal lens, 180° FOV
- 0.0005 lux@F1.0
- Smart Hybrid Light
- IP67

TURBO HD

Smart Hybrid Light Cameras with ColorVu



DS-2CE10DF0T-LPFS
DS-2CE10KF0T-LPFS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE10DF0T-LFS
DS-2CE10KF0T-LFS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE12DF0T-LFS
DS-2CE12KF0T-LFS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE70DF0T-LMFS
DS-2CE70KF0T-LMFS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE70DF0T-LPFS
DS-2CE70KF0T-LPFS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)



DS-2CE72DF0T-LFS
DS-2CE72KF0T-LFS

- 2 MP, 3K, 2.8 mm, 3.6 mm fixed focal lens
- 0.001 lux@F1.0
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67

Smart Hybrid Light Cameras



DS-2CE16D0T-L(P)FS
DS-2CE16G0T-L(P)FS
DS-2CE16K0T-L(P)FS

- 2 MP, 2K, 3K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE17D0T-LFS
DS-2CE17G0T-LFS
DS-2CE17K0T-LFS

- 2 MP, 2K, 3K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE18D0T-LFS
DS-2CE18K0T-LFS

- 2 MP, 3K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE76D0T-LPFS
DS-2CE76G0T-LPFS
DS-2CE76K0T-LPFS

- 2 MP, 2K, 3K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE76D0T-LMFS
DS-2CE76G0T-LMFS
DS-2CE76K0T-LMFS

- 2 MP, 2K, 3K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67



DS-2CE78D0T-LFS
DS-2CE78G0T-LFS
DS-2CE78K0T-LFS

- 2 MP, 2K, 3K resolution
- 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid Light
- Built-in mic
- 4 in 1 (TVI/AHD/CVI/CVBS)
- IP67

DVR

PowerX DVR



AcuSense Technology Two-Way Audio

iDS-7204HQHI-M1/XT

- 4-ch analog video input
- Up to 6-ch IP video input
- Up to 3K/5 MP Lite@12 fps, 2K@10 fps, 1080p@15 fps encoding capability
- 1 SATA interface
- 4 channels AcuSearch
- 2 channels perimeter protection
- 1 channel facial recognition
- Motion Detection 2.0 for all 4 channels



AcuSense Technology Two-Way Audio

iDS-7208HQHI-M1/XT

- 8-ch analog video input
- Up to 12-ch IP video input
- Up to 3K/5 MP Lite@12 fps, 2K@10 fps, 1080p@15 fps encoding capability
- 1 SATA interface
- 8 channels AcuSearch
- 4 channels perimeter protection
- 2 channels facial recognition
- Motion Detection 2.0 for all 8 channels



AcuSense Technology Two-Way Audio

iDS-7216HQHI-M1/XT

- 16-ch analog video input
- Up to 24-ch IP video input
- Up to 3K/5 MP Lite@12 fps, 2K@10 fps, 1080p@15 fps encoding capability
- 1 SATA interface
- 16 channels AcuSearch
- 8 channels perimeter protection
- 4 channels facial recognition
- Motion Detection 2.0 for all 16 channels

HIKVISION



AcuSense Technology Two-Way Audio

iDS-7204HUHI-M1/XT

- 4-ch analog video input
- Up to 8-ch IP video input
- Up to 4K/8 MP@8 fps(1-ch), 3K/5 MP@12 fps encoding capability
- 1 SATA interface
- 4 channels AcuSearch
- 4 channels perimeter protection
- 2 channels facial recognition
- Motion Detection 2.0 for all 4 channels



AcuSense Technology Two-Way Audio

iDS-7208HUHI-M2/XT

- 8-ch analog video input
- Up to 8-ch IP video input
- Up to 4K/8 MP@8 fps, 3K/5 MP@12 fps encoding capability
- 1 SATA interface
- 4 channels AcuSearch
- 8 channels perimeter protection
- 4 channels facial recognition
- Motion Detection 2.0 for all 8 channels



AcuSense Technology Two-Way Audio

iDS-7216HUHI-M2/XT

- 16-ch analog video input
- Up to 32-ch IP video input
- Up to 4K/8MP@8 fps, 3K/5MP@12 fps encoding capability
- 2 SATA interfaces
- 16 channels AcuSearch
- 16 channels perimeter protection
- 4 channels facial recognition
- Motion Detection 2.0 for all 16 channels

Value Series



NEW

Two-Way Audio

DS-7104HGHI-M1/T

- 4-ch analog video input
- Up to 5-ch IP video input
- Up to 1080p lite@15 fps encoding capability
- 1 SATA interface
- Motion Detection 2.0 for all 4 channels



NEW

Two-Way Audio

DS-7108HGHI-M1/T

- 8-ch analog video input
- Up to 10-ch IP video input
- Up to 1080p lite@15 fps encoding capability
- 1 SATA interface
- Motion Detection 2.0 for all 8 channels



NEW

Two-Way Audio

DS-7116HGHI-M1/T

- 16-ch analog video input
- Up to 18-ch IP video input
- Up to 1080p lite@15 fps encoding capability
- 1 SATA interface
- Motion Detection 2.0 for all 16 channels



AcuSense Technology Two-Way Audio

iDS-7204HQHI-M1/T

- 4-ch analog video input
- Up to 6-ch IP video input
- Up to 3K/5 MP lite@12 fps, 2K@10 fps encoding capability
- 1 SATA interface
- 2 channels perimeter protection
- Motion Detection 2.0 for all 4 channels



AcuSense Technology Two-Way Audio

iDS-7208HQHI-M1/T

- 8-ch analog video input
- Up to 12-ch IP video input
- Up to 3K/5 MP lite@12 fps, 2K@10 fps encoding capability
- 1 SATA interface
- 4 channels perimeter protection
- Motion Detection 2.0 for all 8 channels



AcuSense Technology Two-Way Audio

iDS-7216HQHI-M1/T

- 16-ch analog video input
- Up to 24-ch IP video input
- Up to 3K/5 MP lite@12 fps, 2K@10 fps encoding capability
- 1 SATA interface
- 4 channels perimeter protection
- Motion Detection 2.0 for all 16 channels



DISPLAY

SOHO Monitors



DS-D5022F2-1V2
DS-D5022F2-1V2S

- 21.5"
- 1080p
- 250 nits
- 100 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker (Optional)
- HDMI, VGA, Headphone socket



DS-D5024F2-AV2
DS-D5024F2-BV2S

- 23.8"
- 1080p
- 250 nits
- 100 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker (optional)
- HDMI, VGA, Headphone socket



NEW

DS-D5027F3-2P2
DS-D5027F3-2P2S

- 27"
- 1080p
- 300 nits
- 100 Hz refresh rate
- IPS Panel, 1300 : 1
- Built-in speaker (Optional)
- HDMI, VGA, Headphone socket

Security Monitors



DS-D5222F2-1V1S

- 21.5"
- 1080p
- 250 nits
- 75 Hz refresh rate
- VA Panel, 3000 : 1
- Built-in speaker, CVBS BNC, USB
- HDMI, VGA, Headphone socket



DS-D5224F2-1V1S

- 23.8"
- 1080p
- 250 nits
- 75 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker, CVBS BNC, USB
- HDMI, VGA, Headphone socket



DS-D5227U3-1P0

- 27"
- 3840 × 2160 4K
- 350 nits
- 60 Hz refresh rate
- IPS Panel, 1200 : 1
- Display Port 1.4
- HDMI, Headphone socket



DS-D5032F3-1V0S

- 32"
- 1080p
- 300 nits
- 60 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker
- HDMI, VGA, Headphone socket



DS-D5232F2-1V1S

- 32"
- 1080p
- 350 nits
- 60 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker, CVBS BNC, USB
- HDMI, VGA, DVI, Headphone socket



DS-D5043F3-1V0S

- 43"
- 1080p
- 300 nits
- 60 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker, USB
- HDMI, VGA, Headphone socket

4K UHD Monitors



DS-D5043U3-1V0S

- 43"
- 3840 × 2160 4K
- 300 nits
- 60 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker, USB, DP
- HDMI, VGA, Headphone socket



DS-D5050U3-1V0S

- 50"
- 3840 × 2160 4K
- 300 nits
- 60 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker, USB
- HDMI, VGA, Headphone socket



DS-D5055U3-1V0S

- 55"
- 3840 × 2160 4K
- 300 nits
- 60 Hz refresh rate
- VA Panel, 4000 : 1
- Built-in speaker, USB, DP
- HDMI, VGA, Headphone socket

