



GLOBALLY RECOGNIZED COMMAX

COMMAX LEADS THE GLOBAL BRAND AGAIN.



GOLD TOWER ORDER OF INDUSTRIAL SERVICE MERIT AWARD



NATIONAL QUALITY MERIT AWARD PRESIDENTIAL AWARD




KOREA'S No.1 TIME-HONORED BUSINESS



INDUSTRIAL RESEARCH 52 AWARD

MANAGEMENT



NATIONAL HERO AWARDS FOR BRILLIANT ENTERPRISE



THE KOREA'S INFLUENTIAL CEO



KOREA DESIGN AWARD PRIME MINISTER CITATION



KOREA EMPATHY MANAGEMENT AWARD

DESIGN



IF DESIGN AWARD



REDDOT AWARD



IDEA AWARD



GOOD DESIGN AWARD

TECHNOLOGY



KOREA NATIONAL QUALITY CONTROL CIRCLES (2 GOLD PRIZE, 1 SILVER PRIZE)



GYEONGGI-DO QUALITY AWARD (3 GRAND PRIZE, 1 EXCELLENCE AWARD)



EXCELLENT QUALITY COMPETITIVENESS ENTERPRISE (for 15 CONSECUTIVE SELECTIONS)



PATENT AND TECHNOLOGY DEVELOPMENT - AWARD

BRAND



FIRST BRAND AWARDS (for 15 CONSECUTIVE YEARS)



WORLD CLASS PRODUCT OF KOREA (for 17 CONSECUTIVE YEARS)



THE KOREAN INFLUENTIAL BRAND AWARDS (for 3 CONSECUTIVE YEARS)



ADVANCED TECHNOLOGY CENTER

MONITOR

CIP-1000QX

NEW



Connect a smartphone



PRODUCT FEATURES

- SIP based IP monitor
- Control by smartphone connection(Visitor monitoring / Door open)
- HVAC control capability (option to be discussed)
- Guard and elevator call via RS-485 method (Optional connecting CCU-310EV)
- Connecting security, emergency and PIR devices
- Auto recording when motion detected(MAX 16GB)
- Connecting slave phone and digital door lock
- 2 door cameras and 2 CCTV cameras(AHD) • DID function
- 10.1 inch TFT LCD display • AHD camera • AC type(option)

PRODUCT SPECIFICATION

Power source	AC 100~240V(50~60Hz) or DC 14V, 1.8A, PoE S/W
Mount type	Wall-mounted type
Resolution	1280 x 800
OS	RTOS
Video codec	H.264
Network	Ethernet(10/100 Base-T), Wi-Fi
Wiring ports	Door camera : 4 wires, RS-485 : 3 wires, Sensor : 5 wires, Digital door lock : 4 wires (Power : 2 wires, Opening short : 2 wires) Hub : UTP(CAT,5e), DC 12V Out : 2 wires(Only AC type)
Distance	Door camera : 28m(Ø0.5), Hub : 100m(UTP)
Operation temp.	0C ~ +40C
Dimension(mm)	250(W)x210(H)x22(D)

MONITOR

CIP-710Q

NEW



PRODUCT FEATURES

- SIP based IP monitor
- HVAC control capability (option to be discussed)
- Guard and elevator call via RS-485 method (Optional connecting CCU-310EV)
- Connecting security, emergency and PIR devices
- Auto recording when motion detected(MAX 16GB)
- Connecting slave phone and digital door lock
- 2 door cameras and 2 CCTV cameras(AHD)
- DID function • 7 inch TFT LCD display
- AHD camera • AC type(option)

PRODUCT SPECIFICATION

Power source	AC 100~240V(50~60Hz) or DC 14V, 1.8A, PoE S/W
Mount type	Wall-mounted type
Resolution	1024 x 600
OS	RTOS
Video codec	H.264
Network	Ethernet(10/100 Base-T), Wi-Fi
Wiring ports	Door camera : 4 wires, RS-485 : 3 wires, Sensor : 5 wires, Digital door lock : 4 wires (Power : 2 wires, Opening short : 2 wires) Hub : UTP(CAT,5e), DC 12V Out : 2 wires
Distance	Door camera : 28m(Ø0.5), Hub : 100m(UTP)
Operation temp.	0°C ~ +40°C
Dimension(mm)	184(W)x171(H)x22(D)

MONITOR

CIP-710M



PRODUCT FEATURES

- SIP based IP monitor
- 7 inch TFT LCD display
- 1.3MP camera
- HVAC control capability (option to be discussed)
- Guard and elevator call via RS-485 method (Optional connecting CCU-310EV)
- Connecting security, emergency, PIR devices and a digital door lock
- AC type(option)
- DID function

PRODUCT SPECIFICATION

Power source	AC 100~240V(50~60Hz) or DC 14V, 1.8A
Mount type	Wall-mounted type
Resolution	1024 x 600
OS	RTOS
Video codec	H.264
Network	Ethernet(10/100 Base-T)
Wiring ports	Door camera : 4 wires, RS-485 : 3 wires, Sensor: 5 wires, Digital door lock : 4 wires (Power : 2 wires, Opening short : 2 wires) Hub : UTP(CAT.5e), DC 12V Out : 2 wires
Distance	Door camera : 28m(Ø0.5), Hub : 100m(UTP)
Operation temp.	0°C ~ +40°C
Dimension(mm)	244(W)x180(H)x22(D)

ENTRANCE STATION

CIOT-L20M/L20M2



Rainshield(option)

- 7 inch LED Display • SIP-based VoIP system
- 2MP camera • BLE recognition
- TCP/IP Communication
- RFID card • Motion detection
- Elevator call function (Connects to CCU-310EV) (CIOT-L20M2)

Power source	DC 14V, 1.8A
Mount type	Flush-mounted type
Operating temp.	-40°C~+50°C
Wiring ports	LAN(Cat.5e)
Storage	4GB eMMC FLASH
Dimension(mm)	249(W)×256(H)×7(36)(D)
Installation hole size(mm)	210(W)×216(H)
Fill up box size(mm)	220(W)×240(H)×81(D)

DOOR CAMERA

DRC-40QFD



- AHD 2MP
- Built in illumination sensor and white LED
- House call and talk
- Flush-mounted type

Power source	DC 12V(From a monitor)
Operation temp.	-10°C~+50°C
Wiring ports	4 wires
Camera viewing angle	Horiz. : 75°, Vertical : 55° (Adjustable)
Distance	50m(Ø0.65)
Dimension(mm)	110(W)x131(H)x13.5(D)

IP DISTRIBUTOR

CCU-IPBUS




- BUS type(In/Out)
- Board for multi configuration (Need each house)
- 3 Port : Wall pad / Up Link / Down Link

Power source	DC 12V, 50mA
Protocol	Ethernet(10/100 Base-T)
Wiring ports	Monitor/ Up Link/Down Link : UTP(CAT.5e)
Distance	Hub : 100m(UTP)
Dimension(mm)	44(W)x77(H)

APPLICATION

SINGLE HOUSE

SMALL APARTMENT BUILDING TOWNHOUSE, VILLA, CONDO

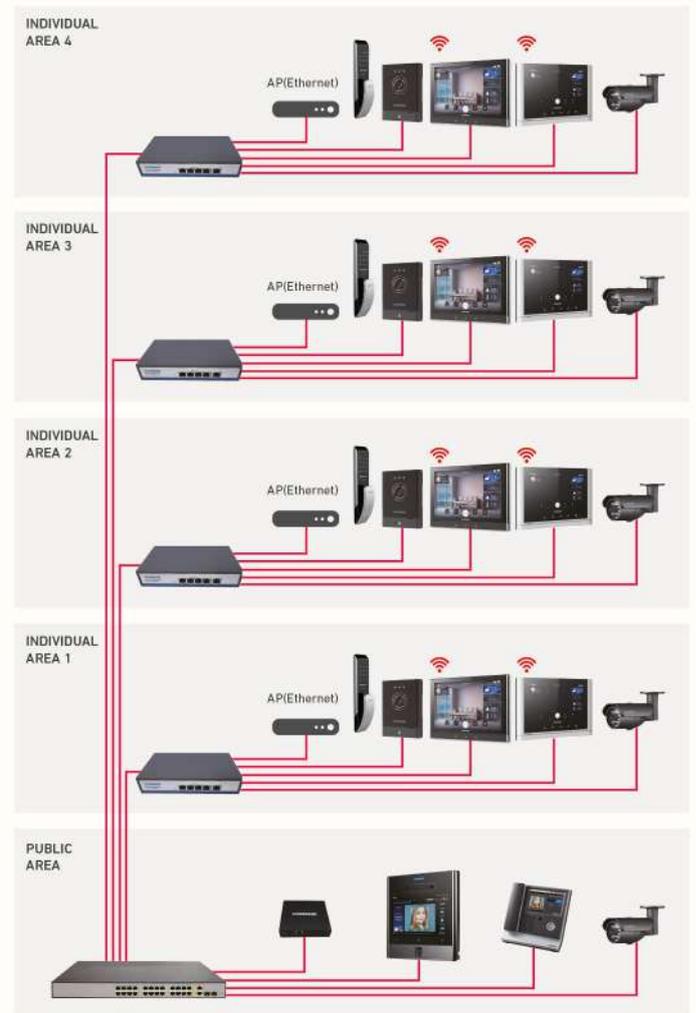

WHEN USING PoE SWITCH HUB (THE ABOVE CASE)

- Device connection is based on monitor + door camera + PoE switch.
- Additional CCTV, generators and cameras can be added as many as PoE switch HUB channels.
- Single House / Small Apartment Building (A, B type) common application

- Multi-Protocol : TCP/IP, Onvif, SIP, H.264, Zigbee, Wi-Fi, BLE
- Multi-Connectivity : Wireless, Wired
- Device : Quad core CPU, FHD Resolution, Multi Touch, Built-in Memory

A.I. HOME MIRROR

CHM-2200

NEW



Connect a smartphone



PRODUCT FEATURES

- Control smart home devices with voice UX via A.I. speaker
- Smart home device and sensor interworking by wire(485) and wireless(ZigBee)
- Control various smart home appliances based on OCF
- Frequently used functions are easily operated by buttons
- Door camera video call, monitoring, door open / Lobby video call and door open / guard station call and talk
- Smart home control and video call through mobile App

PRODUCT SPECIFICATION

Power source	AC 100V~240V, 50~60Hz
Display	22 inch (54.6cm) Mirror LCD
Resolution	1080 x 1920 (Full HD)
CPU	Hexa / Quad Core(option)
Memory / RAM	16GB eMMC (Max. 64GB) / 4GB DDR3
OS	Android
Camera	5M CMOS
Mic / Speaker	Digital MEMS x 2 / 1W x 2
Network	Ethernet(10/100/1000 Base-T), Wi-Fi (2.4GHz, 802.11b/g/n), Bluetooth, ZigBee
Wiring ports	UTP (CAT.5e)
Dimension(mm)	313.4(W)x600.4(H)x27.6(D)

A.I. MONITOR

CAP-1000A [ANSWER]

NEW



Connect a smartphone



PRODUCT FEATURES

- A.I. service platform interwork and voice recognition
- Control smart home devices by voice recognition
- Connect to IoT devices(switch, curtain, blind, gas lock, outlet and plug)
- Opened door, temperature, humidity and activity detection
- Interlock with IoT devices on monitor
- Use bluetooth speaker and extension of smartphone
- Screen brightness optimized by lighting sensor
- Home camera function(optional)

PRODUCT SPECIFICATION

Power source	DC 12V / 2A
Display	10 inch (25.7cm) Touch LCD
Resolution	1280 x 800 (WXGA)
CPU	Quad Core
Memory / RAM	16GB eMMC (Max. 64GB) / 2GB DDR3 (Max. 4GB)
OS	Android
Camera	5M CMOS
Mic	Digital MEMS x 2
Speaker	10W FR X 2ch + Passive Radiator
Network	Wi-Fi (2.4GHz, 802.11b/g/n), ZigBee (2.4GHz HA1.2), Bluetooth 4.0
Sensor	Illuminance, Proximity
Dimension(mm)	250(W)x210(H)x106.3(D)

A.I. SMART MIRROR

CSM-3200

NEW



Connect a smartphone



PRODUCT FEATURES

- Connects to IoT devices
- SIP, WiFi, Zigbee • TCP/IP Communication • Electronic frames
- Applicable for Household, Hotel, Retail outlets
- Android based UX • Providing Full HD smart mirroring environment
- Voice recognition
 Convenience : News, Calendar, TV, Public Notice
 Smart Home : Gas & Boiler and light extinguishment control
 Security : Emergency alarm, CCTV linked security and disaster prevention
 Health Care : 1:1 health check, blood glucose & body fat check etc

PRODUCT SPECIFICATION

Display	32 inch LED Display / Multi Touch
Resolution	1080 x 1920 (Full-HD)
CPU	Hexa core
Memory	2GB LPDDR3 / 16GB eMMC FLASH
OS	Android
Network	Ethernet(10/100/1000 Base-T), Wi-Fi (2.4GHz, 802.11b/g/n), Bluetooth, ZigBee
Dimension(mm)	465(W)×845(H)×50(D)

MONITOR

CIOT-1000Y



Connect a smartphone



PRODUCT FEATURES

- Google, Amazon A.I. platform interwork and voice recognition
- Automatic recording function (door camera motion detection)
- Connectable to both, wireless IoT devices (Zigbee) and wired devices (485 or General type)
- Smartphone integration through COMMAX app
 - door camera, lobby phone, visitor call, door open
 - IoT device control, status monitoring
 - Push notifications in case of emergency, intrusion detection
- Easy registration door camera and CCTV via auto scan
- Visitor storage function (32GB of external memory)

PRODUCT SPECIFICATION

Power source	PoE S/W
Display	10.1 inch Full HD LED Display / Multi Touch
Mount type	Wall-mounted type
Resolution	1280 x 800
OS	Android
CPU	Quad core
Video codec	H.264
Network	Wi-Fi 2.4Ghz, IEEE 802.15.4, Zigbee HA 1.2(Compatible)
Dimension(mm)	261(W)×184(H)×26(D)

MONITOR

CIOT-1020M/1020M2



Connect a smartphone



PRODUCT FEATURES

- Google A.I. platform interwork and voice recognition
- Automatic recording function (door camera motion detection/32GB)
- Connectable to both wireless IoT devices (Zigbee) and wired devices (485 or General type) (CIOT-1020M2)
- Smartphone integration through COMMAX App
 - Door camera, lobby phone, visitor call, door open
 - IoT device control, status monitoring, Push notifications
- Easy registration door camera and CCTV via auto scan

PRODUCT SPECIFICATION

Power source	PoE S/W
Display	10.1 inch Full HD LED Display / Multi Touch
Mount type	Wall-mounted type
Resolution	1280 x 800
CPU	Quad core
OS	Android
Video codec	H.264
Network	Wi-Fi 2.4Ghz, IEEE 802.15.4, Zigbee HA 1.2(Compatible), Ethernet(SIP)
Dimension(mm)	308(W)×213(H)×23(D)

MONITOR

CIOT-700M/700M2



Connect a smartphone



- Google A.I. platform interwork and voice recognition
- Automatic recording function (door camera motion detection/32GB)
- Connectable to both wireless IoT devices (Zigbee) and wired devices (485 or General type) (CIOT-700M2)
- Smartphone integration through COMMAX App
 - Door camera, lobby phone, visitor call, door open
 - IoT device control, status monitoring, Push notification
- Easy registration of door camera and CCTV through auto scan function

Power source	PoE S/W
Display	7 inch LED Display / Multi Touch
Mount type	Wall-mounted type
CPU	Quad core
OS	Android
Network	Wi-Fi 2.4Ghz, IEEE 802.15.4, Zigbee HA 1.2(Compatible), Ethernet(SIP)
Dimension(mm)	244(W)×180(H)×18(D)

MONITOR

CIOT-700ML



Connect a smartphone



- SIP-based VoIP System
- Connects to ACC alarm
- Auto detecting slave monitor
- TCP/IP Communication
- Link with smartphone(Call, Talk)
- Automatic recording function(32GB of external memory)

Power source	PoE S/W
Display	7 inch LED Display / Multi Touch
Mount type	Wall-mounted type
CPU	Quad core
OS	Android
Network	TCP/IP
Dimension(mm)	244(W)×180(H)×18(D)

BIO LOBBY

CIOT-LBIO

NEW



Connect a smartphone



PRODUCT FEATURES

- Fingerprint and facial recognition
- E-Key function(Connect a smartphone)
- Door open by RF card/password
- Application of LTE Modem (option)
- Play local advertisements

PRODUCT SPECIFICATION

Power source	DC 14V, 2.1A
Display	10.1 inch LED Display / Multi Touch
Mount type	Flush-mounted type
Resolution	1024 x 600
OS	Android
CPU	Quad core
Camera	2M IP Camera(Wide angle 142°)
Dimension(mm)	260(W)×270(H)×26(50)(D)

ENTRANCE STATION

CIOT-L20M/L20M2



Connect a smartphone



Rainshield(option)



PRODUCT FEATURES

- 7 inch LED Display
- SIP-based VoIP system
- 2MP camera
- BLE recognition
- TCP/IP Communication
- RFID card
- Motion Detection
- Elevator Call function (Connects to CCU-310EV) (CIOT-L20M2)

PRODUCT SPECIFICATION

Power source	DC 14V, 1.8A
Mount type	Flush-mounted type
Operation temp.	-40°C~+50°C
Wiring ports	LAN(Cat.5e)
Storage	4GB eMMC FLASH
Dimension(mm)	249(W)×256(H)×7(36)(D)
Installation hole size(mm)	210(W)×216(H)
Fill up box size(mm)	220(W)×240(H)×81(D)

ENTRANCE STATION CIOT-L20MP



Rainshield(option)

- House call by household number
- Security office call enable
- Name searching through OLED display
- SIP-based VoIP system
- BLE recognition

Power source	DC 14V, 1.8A
Camera	2M pixel
Angle	90°
OS	Android
Video codec	H.264
Network	BLE, RF, Ethernet
Dimension(mm)	130(W)×248(H)×12(23)(D)
Installation hole size(mm)	112(W)×211(H)

ENTRANCE STATION CIOT-L7FM



Rainshield(option)

- House call by household number
- Security office call enable
- Name searching through LED display
- SIP-based VoIP system
- BLE recognition

Power source	DC 14V, 1.8A
Camera	2M pixel
Angle	120°
OS	Android
Video codec	H.264
Network	BLE, RF, Ethernet
Dimension(mm)	130(W)×248(H)×12(23)(D)
Installation hole size(mm)	112(W)×211(H)

ENTRANCE STATION CIOT-L8TM



Rainshield(option)

- Hidden Pinhole Camera
- Security office call enable
- Name searching through OLED display
- SIP-based VoIP system
- BLE recognition

Power source	DC 14V, 1.8A
Camera	2M pixel
Angle	120°
OS	Android
Video codec	H.264
Network	BLE, RF, Ethernet
Dimension(mm)	130(W)×248(H)×12(23)(D)
Installation hole size(mm)	112(W)×211(H)

ENTRANCE STATION CIOT-L2TM



Rainshield(option)

- House call by household number
- Security office call enable
- Name searching through OLED display
- SIP-based VoIP system
- BLE recognition

Power source	DC 14V, 1.8A
Camera	2M pixel
Angle	120°
OS	Android
Video codec	H.264
Network	BLE, RF, Ethernet
Dimension(mm)	130(W)×248(H)×12(23)(D)
Installation hole size(mm)	112(W)×211(H)

ENTRANCE STATION CIOT-L10M



Rainshield(option)

- 10 button Direct room call
- BLE recognition
- SIP-based VoIP system
- Registering RFID card

Power source	DC 14V, 1.8A
Camera	2M pixel
Angle	120°
OS	Android
Video codec	H.264
Network	BLE, RF, Ethernet
Dimension(mm)	130(W)×248(H)×12(23)(D)
Installation hole size(mm)	112(W)×211(H)

EXTENSION PANEL CIOT-24XM



Rainshield(option)

- Extension panel with name plate
- Call a household unit
- 24 button Direct room call

Direct button	24 Button (max)
Dimension(mm)	130(W)×248(H)×12(23)(D)
Installation hole size(mm)	112(W)×211(H)

DOOR LOCK CAMERA

CIOT-D20DK

NEW



- 3 way access (Password, RF Card, Call button to request permission)
- Enter the password using 10 keypad
- Illuminance sensor
- House call and talk
- Motion detection

Power source	PoE S/W
Mount type	Wall-mounted type
Camera	2M pixel
Angle	110° diagonal
OS	Linux
Video codec	H.264
Dimension(mm)	127(W)x193(H)x54(D)

DOOR CAMERA

CIOT-D21M/D20M



CIOT-D21M CIOT-D20M

- Door lock release (DC Type)
- Link with smartphone (call, talk)
- Digital door lock connectable
- Acrylic/Metallic cover (CIOT-D21M) / Metallic cover (CIOT-D20M)
- Tact button (CIOT-D21M) / Touch button (CIOT-D20M)
- SIP-based VoIP system

Power source	PoE S/W
Mount type	Wall-mounted type
Camera	2M pixel
Angle	130°
OS	Linux
Video codec	H.264
Dimension(mm)	112(W)x146(H)x28(D)

DOOR CAMERA

CIOT-D20Y



- Door lock release (DC type)
- Connect a smartphone (call, talk)
- SIP-based VoIP system
- Touch button
- Digital Door lock connectable
- Motion Detection • Indoor Unit

Power source	PoE S/W
Mount type	Wall-mounted type
Camera	2M pixel
Angle	130°
OS	Linux
Video codec	H.264
Dimension(mm)	108(W)x146(H)x28(D)

DOOR CAMERA

CIOT-D20P



- Vandal proof design
- Smart door lock connectable
- Waterproof (IP 67) • IR LED, range up to 10m
- Day/Night mode & electromechanical IR filter
- Support two-way SIP channel
- Comply with ONVIF Profile S specifications

Power source	PoE S/W
Mount type	Wall-mounted type
Camera	2M pixel, Horiz. 90°
Protection class	IP67
Operation temp.	-10°C ~ +40°C
Wiring ports	UTP
Network	TCP/IP, IPv4, HTTP, RTP, RTSP, NTP, ICMP, SIP
Dimension(mm)	59(W)x164(H)x42(D)

EMERGENCY CALL UNIT

IPEC-911R

NEW



- Guard station call
- Emergency alarm via LED & speaker
- RF card
- VMAX interlocking
- External light bulbs can be operated(option)

Power source	PoE S/W or DC 14V, 1.8A
Mount type	Wall-mounted type
Wiring ports	UTP(Cat.5e)
Camera	2MP CMOS
Interface	Ethernet(10/100 Base-T)
Network	Onvif, SIP
Video codec	H.264
Operation temp.	-10°C~+50°C
Dimension(mm)	127(W)x196(H)x38(D)

GUARD STATION

CIOT-G700M/G701M



- GUI Touch screen
- SIP-based VoIP system
- Emergency check and release
- House call and talk
- Saving visitors image & video clip(Main entrance)
- CCTV monitoring in the public areas (CIOT-G701M)
- Visitor monitoring and calling at the public entrance
- Check security office visitors on the household monitor(CIOT-G701M)

Power source	DC 14V, 2.1A
Display	7 inch Touch LED Display
Mount type	Desktop / Wall-mounted type
Camera	1M pixel, 90°
OS	Android
Video codec	H.264 / MPEG4
Dimension(mm)	252(W)x247(H)x33(D)

IoT TEMP. & HUMIDITY SENSOR

CIS-ZTH02

NEW



Connect a smartphone



IoT



- To sense temperature and humidity in real time within the range (temperature/humidity error : $\pm 0.5^{\circ}\text{C}$ / $\pm 5\%$)
- To send that information to Wallpad and Gateway

Power source	DC 3V(AAAx2 battery)
Mount type	Wall-mount(Adhesive tape)
Network	Zigbee (2.4 GHz)
Wiring ports	Wireless
Distance	50m(without any obstruction)
Operation temp.	-10°C ~ 55°C
Dimension(mm)	Ø61.2x23

IoT PIR SENSOR

CIS-ZP02

NEW



Connect a smartphone



IoT



- To detect motion within the range(checking on wallpad)
- To interact with wallpad for away & prevention mode

Power source	DC 3V(CR123A battery)
Mount type	Wall-mount(Adhesive tape & Magnetic)
Network	Zigbee (2.4 GHz)
Wiring ports	Wireless
Distance	50m(without any obstruction)
Operation temp.	-10°C ~ 55°C
Dimension(mm)	Ø48x53.2

IoT GAS DETECTOR

CIS-ZGD01

NEW



IoT



- Real time gas leak detection
- To generate emergency sounds(72dB) and information to monitor & gateway (When gas leakage is detected)
- To detect neutral gas leak in real time (8% LEL ± 3% LEL)

Power source	DC 12V, 100mA_waiting (separate adaptor)
Mount type	Wall-mounted type
Network	Zigbee (2.4 GHz)
Wiring ports	Wireless
Distance	50m(without any obstruction)
Operation temp.	-10°C ~ 55°C
Dimension(mm)	Ø86x29.6

IoT EMERGENCY BUTTON

CIA-ZEB02

NEW



IoT



- To send emergency signal to monitor & gateway

Power source	DC 3V(CR2032 battery)
Mount type	Wall-mount(Adhesive tape)
Network	Zigbee (2.4 GHz)
Wiring ports	Wireless
Distance	50m(without any obstruction)
Operation temp.	-10°C ~ 55°C
Dimension(mm)	Ø50x16

IoT SMOKE DETECTOR

CIS-ZSD01

NEW



IoT



- Real time smoke detection
- To generate emergency sounds and information to monitor & gateway (When smoke leakage is detected)

Power source	DC 12V
Mount type	Wall-mount(Adhesive tape)
Network	Zigbee (2.4 GHz)
Wiring ports	Wireless
Distance	50m(without any obstruction)
Operation temp.	-10°C ~ 55°C
Dimension(mm)	Ø90x37

IoT WATER DETECTOR

CIS-ZW02

NEW



IoT



- Real time water leak detection IP 66 rated
- Triggers audible alerts through Wallpad and Gateway

Power source	DC 3V(CR2032 battery)
Mount type	Wall-mount(Adhesive tape)
Network	Zigbee (2.4 GHz)
Wiring ports	Wireless
Distance	50m(without any obstruction)
Operation temp.	-10°C ~ 55°C
Dimension(mm)	Ø44.8x14

IoT MAGNETIC SENSOR

CIS-MD02

NEW



IoT



- Window status detection – Open / Close (With in 25mm)
- To interact with monitor for away & prevention mode

Power source	DC 3V(CR2032 battery)
Mount type	Wall-mount(Adhesive tape)
Network	Zigbee (2.4 GHz)
Wiring ports	Wireless
Distance	50m(without any obstruction)
Operation temp.	-10°C ~ 55°C
Dimension(mm)	Main : 26.5x52.5x13.5 Slave : 12.5x25.5x13.5

IoT SMART REPEATER

CIA-ZRT02

NEW



IoT



- Able to register monitor and each repeater device
- Extension of Zigbee wireless section and Zigbee data relay

Power source	DC 5V (Micro USB type)
Operating temp.	0°C~+50°C
Network	IEEE 802.15.4, Zigbee HA 1.2(Compatible)
Dimension(mm)	35(W)x55(H)x16(D)

IoT SMART BLIND

CIA-ZKB01



- Integrated service with IoT Wallpad
- Smart Mirror via 485 to ZigBee module
- Wired connection with Wallpad is available via 485 port
- Multiple Smart Blind control
- Powerful performance and noiseless design

Power source	AC100~250V (50~60MHz)
Output power	107W
Type of motor	Electrical Encode Motor
Motor speed	24rpm (Torque 8/N.M)
Motor diameter	35mm
Receiver	Embedded Type
Position set	4 different positions
Protocol	RS-485, Dry Contact, FM Two-way RF
Max. weight	23.8kg / Single
Environment	Indoor Use

IoT SENSOR (TEMP./HUMIDITY SENSOR)

CIS-ZTH01



- Temperature and humidity measurement
- Flashes LED when battery is low
- Attachment type

Power source	CR2032 2EA, 3V
Operating Time	3 years
Temperature measurement range	-40°C~+125°C (±2°C)
Humidity measurement range	0~100%RH (±4.5%RH)
Network	IEEE 802.15.4, Zigbee HA 1.2(Compatible)
Dimension(mm)	35(W)x55(H)x16(D)

IoT SMART CURTAIN

CIA-ZKC03



- Curtain open, close & stop function
- Wall-mounted type
- Position control of the load check system

Power source	AC 90 - 250V, 50/60Hz
Power consumption	Standby : 1.7W, Operation : 35W
Max. weight (Curtain)	35Kg
Max. Rail length	10m
Operating temp.	-10°C~50°C
Protocol	IEEE 802.15.4, Zigbee HA 1.2(Compatible) RS-485

IoT WIRELESS LIGHT SWITCH

CIA-ZES0A,ZES01~ZES03



- Bulk light control / Light control
- Real time status feedback
- Overload protection
- Sensitive touch control
- Zigbee communication support

Power source	90V~250V, 50Hz~60Hz
Output	CIA-ZES0A : 4000W/1&A CIA-ZES01~ZES03 : 550W/3A(Each Button)
Network	IEEE 802.15.4, Zigbee HA 1.2(Compatible)
Dimension(mm)	90(W)x90(H)x11(43)(D)

IoT HOME APPLIANCE CONTROLLER

CIA-ZIR01

NEW



Connect a smartphone

IoT

IoT



- Able to register IR device
- Support the control of Air-conditioner, TV, and other IR house devices
- Zigbee communication support

Power source	DC 5V (Micro USB type)
Power consumption	0.75W
Frequency	2.4 ~ 2.48 GHz
Temperature	-25°C~+70°C (±1 °C)
IR distance	10m
Network	IEEE 802.15.4, Zigbee HA 1.2(Compatible)
Dimension (mm)	110(W)x32(H)

IoT GAS VALVE BREAKER

CIA-GL03

NEW



Connect a smartphone

IoT

IoT



- Gas valve locking
- Timer function
- Includes display for time confirmation
- Zigbee communication support

Power source	DC 6V (4 AA Batteries)
Sensing temp.	More than 3 minutes at 65°C
Blocking method	Motor Drive Method / Automatic
Blocking time	Within 5 seconds
Action notification	Beep Sound
Network	IEEE 802.15.4, Zigbee HA 1.2(Compatible)
Dimension(mm)	68(W)x136(H)x65(D)

IoT MODULE (485 TO ZIGBEE)

CIM-52Z01

NEW



Connect a smartphone

IoT

IoT



- Zigbee communication support (RS-485 to Zigbee)
- Low power consumption

Power source	DC 5V (Micro USB type)
Network	IEEE 802.15.4, Zigbee HA 1.2(Compatible) RS-485
Dimension(mm)	35(W)x55(H)x16(D)

IoT SMART REPEATER

CIA-ZRT01

NEW



Connect a smartphone

IoT

IoT



- Able to register wallpad and each repeater device
- Extension of Zigbee wireless section and Zigbee data relay

Power source	AC 220 - 250V, 60Hz
Power consumption	Stand by : 0.38 W, Operation : 0.83W
Operating temp.	0°C~+50°C
Network	IEEE 802.15.4, Zigbee HA 1.2(Compatible)
Dimension (mm)	58(W)x112(H)x83(D)

IoT MAGNETIC SENSOR

CIS-MD01

NEW



Connect a smartphone

IoT

IoT



- Door open detection
- Low power consumption
- Zigbee communication support

Power source (Battery)	3V Lithium Cell (CR2032), 2EA
Sensing mode	Magnetic
Installation	Indoor
Operating time	2 Years(50 Times/a day)
Network	IEEE 802.15.4, Zigbee HA 1.2(Compatible)
Dimension(mm)	Sensor : 35(W)x55(H)x16(D) Magnetic : 11(W)x55(H)x16(D)

IoT PIR SENSOR

CIS-ZP01

NEW



Connect a smartphone

IoT



- Motion detection
- Low power consumption
- Zigbee communication support

Power source (Battery)	3V Lithium Cell (CR123A), 1EA
Distance	10m
Angle	84°
Operating time	1.5 Year(10 Times/a day)
Network	IEEE 802.15.4, Zigbee HA 1.2(Compatible)
Dimension(mm)	102(W)x47(H)x64(D)

IoT SMART PLUG

CIA-SP01

NEW



Connect a smartphone

IoT



- Automatic over-current shut-off
- Operational power measurement functions
- Power On-Off
- Code type check required

Power source	AC 100~240V, 50/60Hz
Rated load	250V 16A / MAX 4,000W
Power consumption	Stand by : 0.38W / Operation : 0.83W
Network	IEEE 802.15.4, Zigbee HA 1.2(Compatible)
Dimension(mm)	58(W)x112(H)x83(D)

IoT PIR SENSOR

CIS-PM01

NEW



Connect a smartphone

IoT



- Motion detection
- Temperature & Humidity detection
- Low power consumption
- Zigbee communication support

Power source (Battery)	CR123A 1ea, 3V (Operating Voltage : 2.4~3V)
PIR	Distance 5m Angle 120°
Operating temp.	-40°C ~+125°C(+/-2°C)
Humidity	0~100%RH(+/-5%)
Operating time	1 Year(50 Times/a day)
Network	IEEE 802.15.4, Zigbee HA 1.2(Compatible)
Dimension(mm)	80(W)x80(H)x60(D)

4(8) PORT POE S/W

CIOT-H4L2/H8L2



- 4(8)ch x 10/100Mbps port
- 4(8)ch x supporting network cable powering
- 4(8)ch x cascading LAN interfaces
- Built-in voltage-stabilized power

Power source	AC 100~240V, 50/60Hz
PoE output	DC 52V
Speed	4/8ch x 10/100Mbps
Wiring ports	UTP (100m)
Dimension(mm)	CIOT-H4L2 : 200(W)x120(H)x40(D) CIOT-H8L2 : 270(W)x180(H)x44(D)

SIP GATEWAY

CGW-1KM



- SIP Relay device
- SIP user (unit) registration function (100 units)
- Control of emergency and event history management for SIP user
- Control of Access device (Lobby phone) password and card

Power source	PoE S/W
CPU	Dual Cortex
RAM	DDR3 / 1GB
Flash	eMMC 4GB
OS	Linux
Network	SIP
Dimension(mm)	104(W)x94(H)x29(D)

IP DISTRIBUTOR

CCU-CIOTBUS



- In/Out Bus module for multiplex housing (Need each house)
- 4port : Wall pad / Door camera / Up link / Down link

Power source	DC 14V, 1.8A
Network	Ethernet (10/100 Mbps)
Wiring ports	Wall pad / Door camera / Up link / Down link : UTP(CAT.5e)
Distance	Hub : 100m(UTP)
Dimension(mm)	44(W)x77(H)

MONITOR

CAV-1000QGX / 1001QGX

NEW



Connect a smartphone



PRODUCT FEATURES

- Google A.I. platform interwork(voice recognition)
- Connectable to both wireless IoT devices(Zigbee) and wired devices(RS-485 or General type)
- Smartphone integration through COMMAX App
 - Door camera, lobby phone, visitor call, door open
 - IoT device control, status monitoring, push notifications
- Real-time CCTV monitoring through DVR
- Elevator call function
- Automatic recording function(motion detection)
- SD card(32GB)

PRODUCT SPECIFICATION

Power source	CAV-1000QGX : DC 14V, 1.8A CAV-1001QGX : AC 100~240V, 50/60Hz
Display	10.1 inch LED Display / Multi Touch
Mount type	CAV-1000QGX : Flush-mounted type CAV-1001QGX : Wall-mounted type
Resolution	1280 x 800
Camera	2MP
Wiring ports	Door camera : 4 wires or 8 wires(only motion detecting), RS-485 : 3 wires, Lobby/Security : 8 wires(UTP type 2 Port) Gas : 3 wires, Motion detecting : 3 wires, Slave : 6 wires, Door detecting : 2 wires, Fire emergency : 2 wires, Digital door lock : 4 wires (Power 2 wires, Opening short : 2 wires)
Distance	Door camera : 28m(Ø0.5) Lobby : 300m(Ø0.5) Security : 1 km(Ø0.65)
Dimension(mm)	CAV-1000QGX : 250(W)×210(H)×10.8(14.8)(D) CAV-1001QGX : 250(W)×210(H)×22(D)


MONITOR

CAV-70QGX

NEW



Connect a smartphone

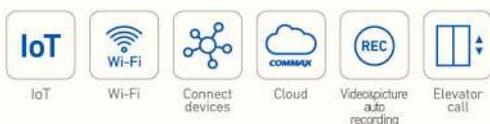

PRODUCT FEATURES

- Remote control by smartphone connection (Visitor monitoring / Door open)
- Control air conditioner and calling elevator via RS-485 method
- Connecting security, emergency and PIR devices
- Guard and elevator call(optional connecting CCU-310EV)
- Auto recording when motion detected(MAX 32GB)
- Connecting digital door lock
- 7 inch touch and full HD display(2MP)

PRODUCT SPECIFICATION


Power source	AC 100-240V, 50/60Hz
Mount type	Wall-mounted type
Resolution	1024 x 600
OS	Android
Wiring ports	Door camera : 4 wires or 8 wires(only motion detecting), RS-485 : 3 wires, Lobby/Security : 8 wires(UTP type 2 Port) Gas : 3 wires, Motion detecting : 3 wires, Slave : 6 wires, Door detecting : 2 wires, Fire emergency : 2 wires, Digital door lock : 4(Power 2 wires, Opening short : 2 wires
Distance	Door camera : 28m(Ø0.5) Lobby : 300m(Ø0.5) Security : 1km(Ø0.65)
Operation temp.	0°C ~ +40°C
Dimension(mm)	184(W)x171(H)x23(D)

MONITOR

CAV-1020MGX+/1021MGX+



Connect a smartphone

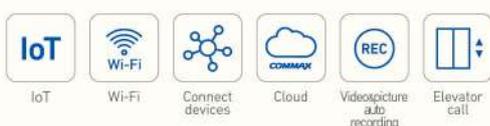

PRODUCT FEATURES

- Connects to IoT devices
- Connect a smartphone(Call, Talk, Control)
- Real-time CCTV monitoring through DVR
- Elevator call function
- Guard call & talk
- Storing visitor video
- Connectable with slave phone

PRODUCT SPECIFICATION

Power source / Consumption	CAV-1020MGX+ : DC 14V, 1.8A CAV-1021MGX+ : AC 100-240V, 50/60Hz
Display	10.1 inch LED Display / Multi Touch
Mount type	CAV-1020MGX+ : Flush-mounted CAV-1021MGX+ : Wall-mounted
Operating temp.	0°C~40°C
Wiring ports	UTP(CAT. 5e)
Network	Wi-Fi 2.4Ghz, IEEE 802.15.4, Zigbee HA 1.2(Compatible)
Dimension(mm)	CAV-1020MGX+ : 308(W)x213(H)x33(D) CAV-1021MGX+ : 308(W)x213(H)x25(D)
Installation hole size(mm)	CAV-1020MGX+ : 209(W)x135(H)

MONITOR

CAV-70MGX+



Connect a smartphone



IoT



Cloud



Wi-Fi



Video picture and recording



Elevator call



Connect devices



- Connects to IoT devices
- Connect a smartphone(Call, Talk, Control)
- 7 inch full touch display
- Real-time CCTV monitoring through DVR
- Elevator call function • Guard call & talk
- Storing visitor video

Power source / Consumption	AC 100-240V, 50/60Hz / 15W (MAX)
Display	7 inch touch LED Display
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	UTP(CAT. 5e)
Distance	Lobby phone : 300m / Security office : 1Km
Network	Wi-Fi 2.4Ghz, IEEE 802.15.4, Zigbee HA 1.2(Compatible)
Dimension(mm)	244(W)×180(H)×18(D)

FHD VIDEO RECORDER

CVD-AF04SH PLUS



- Audio input 4ch & audio output 1ch
- Alarm input 4ch & alarm output 1ch
- CVBS video output for only COMMAX monitor(Gateview+)

Power source	DC 12V, 2A
Video input	4 BNC
Video output	HDMI(1080p), VGA, CVBS
Audio input/output	4/1
Video codec	H.264
Playback speed	Max x16 for forward playback
HDD	1 SATA HDD slot
Dimension(mm)	300(W)×227(H)×53(D)

CCTV DISTRIBUTOR

VD-202G+




- CCTV distributor for gateview+ system
- To send CCTV video to a monitor
- To connect CCTV video
- Able to add VD-202G+

Power source	AC 100-240V, 50/60Hz / 15W (MAX)
Power consumption	Waiting 180mA, Max 200mA
Wiring ports	Guard : 8 wires Lobby : Talk 2 wires, Video 2 wires Monitor : 6 wires, Video 2 wires DVR : (RS-485) 4 wires, Video 2 wires
Distance	Video : Lobby/DVR to Monitor (Max 300m) Guard(Max 1km)
Dimension(mm)	182(W)×102(H)×26(D)

ELEVATOR CONNECTOR

CCU-310EV



- Able to call from Lobbyphone and Monitor (Lobby mode / Unit mode)
- Unit mode : Able to set up to 630 units or 80 floors
- Lobby mode : Able to set up to 89 Lobbyphones

Power source	DC 12V, 1A
Mount type	Wall-mounted type, DIN rail type
Wiring ports	DATA : 2 wires Elevator S/W : 2 wires x 10 ports
Distance	1 km (Ø.65)
Dimension(mm)	157(W)×86(H)×59(D)


MONITOR

CDP-1400YB

NEW



Connect a smartphone



PRODUCT FEATURES

- SIP-based VoIP system
- TCP/IP
- Interlocking with Digital door lock
- CCTV monitoring
- Convenient Function(Parking, Entrance, Package record, Weather)
- Elevator call, Boiler control
- Connects to ACC alarm

PRODUCT SPECIFICATION

Power source	DC 14V, 1.8A
Display	13.3 inch Touch LED Display / Multi Touch
Mount type	Flush-mounted type
Wiring ports	UTP(CAT.5e)
OS	Android OS
Distance	Door station : 50m(0.65Ø), L2 S/W : 100m
Dimension(mm)	351(W)x232(H)x13(32)(D)
Installation hole size(mm)	255(W)x153(H)

MONITOR

CDP-1000YB

NEW



Connect a smartphone



IP



Connect devices



Cloud



Elevator call



- SIP-based VoIP system
- TCP/IP
- Interlocking with Digital door lock
- CCTV monitoring
- Convenient Function(Parking, Entrance, Package record, Weather)
- Elevator call, Boiler control
- Connects to ACC alarm

Power source	DC 14V, 1.8A
Display	10.1 inch Touch LED Display / Multi Touch
Mount type	Flush-mounted type
Wiring ports	UTP(CAT.5e)
OS	Android OS
Distance	Door station : 50m(0.65Ø), L2 S/W : 100m
Dimension(mm)	265(W)x184(H)x14(32)(D)
Installation hole size(mm)	209(W)x133(H)

MONITOR

CDP-1020YB



Connect a smartphone



IP



Connect devices



Cloud



Elevator call



- SIP-based VoIP system
- TCP/IP
- Interlocking with Digital door lock
- CCTV monitoring
- Convenient Function(Parking, Entrance, Package record, Weather)
- Elevator call, Boiler control
- Connects to ACC alarm

Power source	DC 14V, 2A
Display	10.1 inch Touch LED Display / Multi Touch
Mount type	Flush-mounted type
Wiring ports	UTP(CAT.5e)
OS	Android OS
Distance	Door station : 50m(0.65Ø), L2 S/W : 100m
Dimension(mm)	261(W)x184(H)x14(32)(D)
Installation hole size(mm)	209(W)x133(H)

MONITOR

CDP-1400MB



Connect a smartphone



PRODUCT FUNCTION & SERVICE

- SIP-based VoIP system • TCP/IP
- Interlocking with Digital door lock
- CCTV monitoring
- Convenient function(Parking, Entrance, Package record, Weather)
- Elevator call, HVAC control
- Connects to ACC alarm

PRODUCT SPECIFICATION

Power source	DC 14V, 1.8A
Display	14 inch Touch LED Display / Multi Touch
Mount type	Flush-mounted type
Wiring ports	UTP(CAT.5e)
OS	Android OS
Distance	Door station : 50m(0.65Ø), L2 S/W : 100m
Dimension(mm)	328(W)x230(H)x14(32)(D)

MONITOR

CSH-1020MB



Connect a smartphone



- SIP-based VoIP system • TCP/IP
- Interlocking with door lock
- CCTV monitoring
- Convenient Function(Parking, Entrance, Package record, Weather)
- Elevator call, boiler control
- Connects to ACC alarm

Power source	DC 14V, 1.8A
Display	10.1 inch Touch LED Display / Multi Touch
Mount type	Flush-mounted type
Wiring ports	UTP(CAT.5e)
OS	Android OS
Distance	Door station : 50m(0.65Ø), L2 S/W : 100m
Dimension(mm)	308(W)x213(H)x14(23)(D)
Installation hole size(mm)	208(W)x140(H)

MONITOR

CDP-1020MB



Connect a smartphone



- SIP-based VoIP system • TCP/IP
- Interlocking with door lock
- CCTV monitoring
- Convenient Function(Parking, Entrance, Package record, Weather)
- Elevator call, Boiler control
- Connects to ACC alarm

Power source	DC 14V, 1.8A
Display	10.1 inch Touch LED Display / Multi Touch
Mount type	Flush-mounted type
Wiring ports	UTP(CAT.5e)
OS	Android OS
Distance	Door station : 50m(0.65Ø), L2 S/W : 100m
Dimension(mm)	308(W)x213(H)x13(33)(D)
Installation hole size(mm)	209(W)x135(H)

BIO LOBBY

DRC-BIOS

NEW



Connect a smartphone



PRODUCT FEATURES

- Fingerprint and facial recognition
- E-Key function(Connect a smartphone)
- Door open by RF card/password
- Application of LTE Modem(option)
- Play local advertisements

PRODUCT SPECIFICATION

Power source	DC 14V, 2.1A
Display	10.1 inch LED Display / Multi Touch
Mount type	Flush-mounted type
Resolution	1024 x 600
OS	Android
CPU	Quad core
Camera	2M IP camera(Wide angle 142°)
Dimension(mm)	260(W)×270(H)×26(50)(D)
Installation hole size(mm)	207(W)×217(H)

ENTRANCE STATION

DRC-7MS



Connect a smartphone



Rainshield (option)



PRODUCT FEATURES

- 7 inch LED Display
- BLE recognition
- Full-HD resolution
- SIP-based VoIP system
- 2MP Camera
- Page and call a household unit or a security guard station
- Embedded RFID

PRODUCT SPECIFICATION

Power source	DC 14V, 1.8A
Mount type	Flush-mounted type
Wiring ports	UTP(CAT. 5e)
RFID card	13.56Mhz
Angle of view	Horiz. : 81° / Vert. : 66°
Operation temp.	-40°C~+50°C
Dimension(mm)	249(W)×256(H)×7(36)(D)
Installation hole size(mm)	210(W)×216(H)
Fill up box size(mm)	220(W)×240(H)×81(D)

KITCHEN TV PHONE

CKV-1020FS



- Digital TV/High sensitivity digital FM
- Tempered Glass with touch panel
- User-friendly GUI
- Telephone call receiving enabled, Video playback
- Built-in MP3

Power source	AC 100~240V, 50/60Hz
Display	10.1 inch Touch LED display
Mount type	Wall-mounted type
Package	Main console, Remote control
Signal	ATSC/QAM (Unscrambled)
H/N, H/A	RS-485
Dimension(mm)	322(W)×262(H)×34(D)

GUARD STATION

CDS-70M



- Household paging and calling function
- Visitor monitoring and calling at the public entrance
- CCTV monitoring in public areas
- SIP-based VoIP system

Power source	DC 14V, 1.8A
Display	7 inch wide color LCD
Mount type	Desktop / Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	LAN(CAT.5e)
Data transmission	TCP/IP
Dimension(mm)	252(W)×247(H)×40(D)

SENSOR

CPA-4012



- Infrared ray energy sensor
- Normal operation enabled after 30 seconds from power on
- Indoor use
- Wall mounted type

Power/consumption	DC 8~18V / Max 20mA
Alarm output	1B(COM, NC OR NO)
Detection speed / range	0.3~1.5m/s / 0.5~12m
Installation	2.5m
Operating temp.	-20°C~+60°C
Weight(g)	68
Dimension(mm)	63(W)×110(H)×47(D)

SENSOR

CPA-0212



- Mirror-type infrared sensor
- Detects infrared rays from 7um~15umz
- Indoor use
- Ceiling mounted type

Power/consumption	DC 9~18V / Max 10mA
Alarm output	1B(COM, NC OR NO)
Detection speed / range	0.2~1.5m/s / 12m (Mirror type)
Alarm time	2 Sec
Installation	1.8~3m
Operating temp.	-20°C~+60°C
LED	Warning : - Intrusion : Red

SENSOR

MS-10



- Magnetic type sensor
- Indoor use
- Door/Window frame wall-mounted type

Power input	DC 9~13V
Consumption	Max 10mA
Effective range	27mm
Detection type	N.C
Reed S/W	Flex/MDSR Type
Operating temp.	-20°C~+70°C
Dimension(mm)	12(W)×55(H)×13(D)

SENSOR

CPB-30S



- Minimum reflection
- Wide range of adjustment
- IP44 compliance
- Suitable for both, indoor and outdoor installation

Power input	DC 11~25VDC
Power consumption	Max 57mA
Detection method	Near-infrared / Beam block
Detection range	Outdoor : 30m / Indoor : 60m
Detection type	Pulse beam by LED Double variation method
LED	Warning : Green, Intrusion : Red
Operating temp.	-20°C~+60°C
Dimension(mm)	63(W)×163(H)×75(D)

SENSOR

CPB-10S



- Minimum reflection
- Wide range of adjustment
- IP44 compliance
- Suitable for both, indoor and outdoor installation.

Power input	DC 11~25VDC
Power consumption	Max 57mA
Detection method	Near-infrared / Beam block
Detection range	Outdoor : 10m / Indoor : 20m
Detection type	Pulse beam by LED Double variation method
LED	Warning : Green, Intrusion : Red
Operating temp.	-20°C~+60°C
Dimension(mm)	63(W)×163(H)×75(D)

SERVER

CHS-10LS/DS/BS



- Operation function of resident administration page
- Interlocking with smart metering, parking, courier, DVR and elevator servers
- Residential units, complexes and product data storage

CPU	Intel® Xeon "Harpertown" E5405 (Quad Core/2.0G, 12M, 1333Mhz)
RAM	4G DDR FB-DIMM(2G×2ea) 8 slots(Max.16G)
OS	Embedded Linux
ODD	1TB S-ATA3, 7200rpm, 32MB
Dimension(mm)	430(W)×44(H)×650(D)

LAYER 3 SWITCH

CSS-24H3/DY



- Twenty 100/1000Base-X ports and four GE combo ports
- Subcards supported : 4x1000Base-X SFP subcard, 2x10GE SFP+ subcard and 4x10GE SFP+subcard

Downlink port	Twenty-four 10/100M electrical ports
Uplink port	2GE electrical ports 2GE SFP optical ports
MAC address table	8K MAC
Input voltage	AC100-240V, 50/60Hz
Power consumption	20W
Operating temp.	0°C~45°C
Dimensions(mm)	442(W)×44(H)×220(D)

LAYER 2 SWITCH

CSS-24H2/DY



- Twenty-four 10/100M Ethernet electrical port
- Two GE RJ45 ports
- Two GE SFP port
- AC Power supply
- Packet forwarding rate : 9.6 Mpps
- Switching capacity : 12.8 Gbps

RAM	63W
Fixed port	20×100/1000Base-X ports and 4 Combo
Forwarding performance	96Mpps
Switching capacity	128Gbps
MAC address table	32K
Input voltage	AC 100-240V, 50/60Hz DC -48V~-60V
Dimension(mm)	442(W)×44(H)×420(D)

MONITOR

CMV-70MX



- Connectable with smartphone and security IoT sensor
- 7 inch multi touch LED display
- CCTV monitoring
- Guard, porter call & talk
- Compatible with single house, apartment and condo complex
- Connectable to both wireless IoT devices(Zigbee) and wires devices

Power source	AC 100-240V, 50/60Hz
Display	7 inch LED Display / Multi Touch
Mount type	Wall-mounted type
Wiring ports	Door camera 1 : 4 wires, Door camera 2 : 4 wires / Distributor : UTP(CAT.5e), Interphone : 4 wires / DDL : 4 wires(Power : 2 wires / Opening short : 2 wires) / Sensor : 11 wires
Network	Wi-Fi 2.4Ghz, IEEE 802.15.4, Zigbee HA 1.2(Compatible)
Dimension(mm)	244(W)x180(H)x18(D)

MONITOR

CMV-77K/77KD



- Visitor identification and call via smartphone(CGW-M2I)
- CCTV Monitoring
- Guard, porter call & talk
- Video call and door lock release enable
- Compatible with single house and apartment complex

Power source	CMV-77K : AC 100-240V, 50/60Hz CMV-77KD : DC 24V(from CMD-404FUD)
Display	7 inch wide LED display
Mount type	Wall-mounted type
Wiring ports	Door camera 1 : 4 wires, Door camera 2 / Distributor : 4 wires / UTP(CAT.5e), Interphone : 4 wires
Operating temp.	0°C~+40°C
Distance	28m(0.5mm) / 50m(0.65mm) / 70m(0.8mm)
Dimension(mm)	311(W)x168(H)x32(D)

MONITOR

CMV-70S/70SD



- Visitor identification and call via smartphone(CGW-M2I)
- CCTV Monitoring
- Guard, porter call & talk
- Video call and door lock release enable
- Compatible with single house and apartment complex

Power source	CMV-70S : AC 100-240V, 50/60Hz CMV-70SD : DC 24V(from CMD-404FUD)
Display	7 inch wide LED display
Mount type	Wall-mounted type
Wiring ports	Door camera 1 : 4 wires, Door camera 2 / Distributor : 4 wires / UTP(CAT.5e), Interphone : 4 wires
Operating temp.	0°C~+40°C
Distance	28m(0.5mm) / 50m(0.65mm) / 70m(0.8mm)
Dimension(mm)	244(W)x180(H)x32(D)

MONITOR

CMV-70M/70MD



- Visitor identification and call via smartphone(CGW-M2I)
- CCTV Monitoring
- Guard, porter call & talk
- Video call and door lock release enable
- Compatible with single house and apartment complex

Power source	CMV-70M : AC 100-240V, 50/60Hz CMV-70MD : DC 24V(from CMD-404FUD)
Display	7 inch wide LED display
Mount type	Wall-mounted type
Wiring ports	Door camera 1 : 4 wires, Door camera 2 / Distributor : 4 wires / UTP(CAT.5e), Interphone : 4 wires
Operating temp.	0°C~+40°C
Distance	28m(0.5mm) / 50m(0.65mm) / 70m(0.8mm)
Dimension(mm)	244(W)x180(H)x18(D)

MONITOR

CMV-43S/43SD



- Visitor identification and call via smartphone(CGW-M2I)
- CCTV Monitoring
- Guard, porter call & talk
- Compatible with single house and apartment complex

Power source	CMV-43S : AC 100-240V, 50/60Hz
	CMV-43SD : DC 24V(from CMD-404FUD)
Mount type	Wall-mounted type
Wiring ports	Door camera 1 : 4 wires, Door camera 2 / Distributor : 4 wires / UTP(CAT.5e), Interphone : 4 wires
Operating temp.	0°C~+40°C
Distance	28m(0.5mm) / 50m(0.65mm) / 70m(0.8mm)
Dimension(mm)	180(W)×244(H)×32(D)

MONITOR

CMV-43A/43AD



- Visitor identification and call via smartphone(CGW-M2I)
- CCTV Monitoring
- Guard, porter call & talk
- Compatible with single house and apartment complex

Power source	CMV-43A : AC 100-240V, 50/60Hz
	CMV-43AD : DC 24V(from CMD-404FUD)
Mount type	Wall-mounted type
Wiring ports	Door camera 1 : 4 wires, Door camera 2 / Distributor : 4 wires / UTP(CAT.5e), Interphone : 4 wires
Operating temp.	0°C~+40°C
Distance	28m(0.5mm) / 50m(0.65mm) / 70m(0.8mm)
Dimension(mm)	180(W)×180(H)×28(39)(D)

AUDIO PHONE

CMA-3L/3LD



- Guard Call & Talk
- Door lock release enable
- Compatible with single house and apartment complex

Power source	AC 220V, 50/60Hz
	DC 24V(from CMD-404FUD)
Mount type	Wall-mounted type
Operating temp.	0°C~+40°C
Distance	28m(0.5mm) / 50m(0.65mm) / 70m(0.8mm)
Dimension(mm)	98(W)×215(H)×43(D)

ENTRANCE STATION

DRC-7MBL/RF1



Rainshield(option)

- BLE recognition
- 3.5 inch LED Display
- Page and call a household unit or a security guard station
- Embedded RFID

Power source	DC 12V, 1A
Mount type	Flush-mounted type
Operating temp.	-20°C~+50°C
Wiring ports	UTP(CAT. 5e)
Distance	Max.300m
RFID card	13.56Mhz(optional)
Angle of view	Horiz. : 81°, Vert.: 66°
Dimension(mm)	249(W)×256(H)×7(36)(D)
Installation hole size(mm)	210(W)×216(H)


MONITOR

CAV-705MX

NEW



Connect a smartphone



PRODUCT FEATURES

- Guard talk 3ch
- Elevator call
- Storing visitor video
- 7 inch LED Display
- Guard call & talk
- Video talk and door lock release enable (both individual and public entrance)
- Connect IoT devices
- Connect a smart phone(Call, Talk, Control)


PRODUCT SPECIFICATION

Power source	DC 14V, 1.8A
Display	7 inch LED Display
Mount type	Flush mounted type
Operating temp.	0°C~40°C
Wiring ports	Guard/Lobby : UTP(CAT.5e)+Coaxial cable or UTP(CAT.5e) Door camera : 4 wires, Door open detection : 2 wires, Motion detection : 3 wires, Fire : 2 lines, Gas : 3 wires, Evacuation ladder : 2 wires, DDL : 4 wires (2 power wires, 2 doors open)
Consumption	Max.15W
Distance	Lobby phone : 300m / Security office : 1Km
Dimension(mm)	244(W)×180(H)×9(30)(D)

MONITOR

CAV-711M

NEW



PRODUCT FEATURES

- Guard talk 3ch
- Elevator call
- 7 inch LED Display
- Guard call & talk
- Security function
- Video talk and door lock release enable (both individual and public entrance)

PRODUCT SPECIFICATION

Power source	AC 100-240V, 50/60Hz
Display	7 inch LED Display
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	Guard/Lobby : UTP(CAT.5e)+Coaxial cable or UTP(CAT.5e) Camera : 4 wires / Evacuation ladder : wires / Door open detection: 2 wires / Motion detection: 3 wires / Emergency : 2 wires / DDL: 4 wires / Power : 2 wires / Door open : 2 wires
Consumption	Max.15W
Distance	Lobby phone : 300m / Security office : 1Km
Dimension(mm)	244(W)×180(H)×18(D)

MONITOR

CAV-70HS



PRODUCT FEATURES

- 7 inch LED Display
- Home network/ home automation slave phone
- Video talk and door lock release enabled (both individual and public entrance)

PRODUCT SPECIFICATION

Power source	AC 100-240V, 50/60Hz
Display	7 inch LED Display
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	6 wires
Consumption	12W (Max)
Distance	Monitor : 30m (0.65Ø)
Dimension(mm)	180(W)×180(H)×28(D)

MONITOR

CDP-1020ID



PRODUCT FEATURES

- 10.1 inch TFT LED display
- DID function
- Security and Lighting controls
- Energy management system
- Users can connect remotely via their smartphones(Secumax)

PRODUCT SPECIFICATION

Power source	DC14V, 1.8A
Power consumption	Standby : 560mA, Max.: 1.4A
Display	10.1 inch TFT LED display
Mount type	Flush-mounted type
Operating temp.	0°C~40°C
Wiring ports	Guard/Lobby ; Common 10 wires+ 5C2V Coaxial cable(2 Wire) Door camera : 4 wires
Distance	Individual entrance : 50m(0.65Ø) / Guard station : 1km(0.65Ø) / Public entrance : 300m(5C2V)
Dimension(mm)	318(W)×215(H)×18(61)(D)
Installation hole size(mm)	270(W)×164(H)

ENTRANCE STATION

DRC-7MBL/RF1



Rainshield(option)



PRODUCT FEATURES

- BLE recognition
- 3.5 inch LED Display
- Page and call a household unit or a security guard station
- Embedded RFID

PRODUCT SPECIFICATION

Power source	DC 12V, 1A
Mount type	Flush-mounted type
Operating temp.	-20°C~+50°C
Wiring ports	UTP(CAT. 5e)
RFID card	13.56Mhz(optional)
Angle of view	Horiz. : 81°, Vert.: 66°
Dimension(mm)	249(W)×256(H)×7(36)(D)
Installation hole size(mm)	210(W)×216(H)
Fill up box size(mm)	220(W)×240(H)×81(D)

ENTRANCE STATION

DRC-703LC/RF1



- Page and call a household unit or a security guard station
- Various verification methods(PIN number/RFID card)
- Expandable up to 99 units of DRC-703 LC/RF1
- Mirror view of a visitor enabled when paging

Power source	DC 12V, 1A
Mount type	Flush-mounted type
Operating temp.	-20°C~+50°C
Wiring ports / Distance	UTP(CAT. 5e) / Max.300m
RFID card	13.56Mhz
Min. Illumination	0.3Lux
Dimension(mm)	244(W)×270(H)×17(43)(D)
Installation hole size(mm)	207(W)×217(H)

GUARD STATION

CDS-481L



- Paging and calling a household
- Call to lobby phones
- Checking and Setting out in household
- Exchanging calls between household

Power source	AC 100V~220V, 50/60Hz
Power consumption	Max.: 7W
Mount type	Desktop
Operating temp.	0°C~40°C
Wiring ports	UTP(Cat. 5e)
Distance	1Km (0.65Ø)
Dimension(mm)	328(W)×230(H)×97(D)

MONITOR

CAV-70MG2



Connect devices

Elevator call

PRODUCT FEATURES

- 7 inch LED Display
- Guard call & talk
- Elevator call function
- Video talk and door lock release enable (both individual and public entrance)

PRODUCT SPECIFICATION

Power source	AC 100-240V, 50/60Hz
Display	7 inch LED Display
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	UTP(CAT. 5e)
Power consumption	Max.15W
Distance	Lobby phone : 300m / Security office : 1Km
Dimension(mm)	244(W)×180(H)×18(D)

MONITOR

CAV-70MG+



PRODUCT FEATURES

- CCTV Monitoring with VD-202G+ Expandable up to 8 CCTV cameras)
- 7 inch LED Display
- Guard call & talk
- Video talk and door lock release enable (both individual and public entrance)

PRODUCT SPECIFICATION

Power source	AC 100-240V, 50/60Hz
Display	7 inch LED Display
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	UTP(CAT. 5e)
Power consumption	Max.15W
Distance	Lobby phone : 300m / Security office : 1Km
Dimension(mm)	244(W)×180(H)×18(D)

MONITOR

CAV-70MG



- 7 inch LED Display
- Video talk and door lock release enable (both individual and public entrance)
- Guard call & talk • OSD

Power source	AC 100-240V, 50/60Hz
Display	7 inch LED Display
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	UTP(CAT. 5e)
Power consumption	Max.15W
Distance	Lobby phone : 300m / Security office : 1Km
Dimension(mm)	244(W)×180(H)×18(D)

MONITOR

CAV-70MHG



Elevator call



- 7 inch LED Display • Elevator call function
- Video talk and door lock release enable (both individual and public entrance)
- OSD • Guard call & talk

Power source	AC 100-240V, 50/60Hz
Display	7 inch LED Display
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	UTP(CAT. 5e)
Power consumption	Max.15W
Distance	Lobby phone : 300m / Security office : 1Km
Dimension(mm)	293(W)×180(H)×34(D)

MONITOR

CAV-43MHG



- 4.3 inch LED Display
- Video talk and door lock release enable (both individual and public entrance)
- Guard call & talk • OSD

Power source	AC 100-240V, 50/60Hz
Display	7 inch LED Display
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	UTP(CAT. 5e)
Power consumption	Max.15W
Distance	Lobby phone : 300m / Security office : 1Km
Dimension(mm)	230(W)×180(H)×41(D)

MONITOR

CAV-43MG



- 4.3 inch LED Display • Guard call & talk • OSD
- Video talk and door lock release enable (both individual and public entrance)

Power source	AC 100-240V, 50/60Hz
Display	7 inch LED Display
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	UTP(CAT. 5e)
Power consumption	Max.15W
Distance	Lobby phone : 300m / Security office : 1Km
Dimension(mm)	180(W)×180(H)×28(D)

MONITOR CAV-43MG2



Elevator
call



- 4.3 inch LED Display
- Guard call & talk
- Elevator call function
- Video talk and door lock release enable
(both individual and public entrance)

Power source	AC 100-240V, 50/60Hz
Display	4.3 inch LED Display
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	UTP(CAT. 5e)
Power consumption	Max.15W
Distance	Lobby phone : 300m / Security office : 1Km
Dimension(mm)	180(W)×180(H)×28(D)

BIO LOBBY DRC-BIOL

NEW



Connect a
smartphone



BLE



RF card



Facial
Recognition



Fingerprint
Recognition



- Fingerprint and facial recognition
- Door open by BLE, RFID, Password(BLE : Smartphone App)
- Page and call a household unit or a security guard station

Power source	DC 14V, 2.1A
Display	10.1 inch LED Display / Multi Touch
Mount type	Flush-mounted type
Resolution	1024 x 600
OS	Android
CPU	Quad core
Camera	2M IP Camera(Wide Angle 142°)
Dimension(mm)	260(W)×270(H)×26(50)(D)
Installation hole size(mm)	207(W)×217(H)

ENTRANCE STATION DRC-7MBL/RF1



Rainshield(option)

- Door open by BLE, RFID, Password (BLE : Smartphone App)
- Page and call a household unit or a security guard station

Power source	DC 12V, 1A
Mount type	Flush-mounted type
Operating temp.	-20°C~+50°C
Wiring ports	UTP(CAT. 5e)
Distance	Max.300m
RFID card	13.56Mhz
Dimension(mm)	249(W)×256(H)×7(36)(D)
Installation hole size(mm)	210(W)×216(H)
Fill up box size(mm)	220(W)×240(H)×81(D)

ENTRANCE STATION DRC-703LC/RF1



- Page and call a household unit or a security guard station
- Various verification methods (PIN number and RFID card)
- Expandable up to 99 units of DRC-703 LC/RF1

Power source	DC 12V, 1A
Mount type	Flush-mounted type
Wiring ports	Building Distributor : UTP
RFID card	13.56Mhz(optional)
Angle of view	Horiz.: 68°, Vert.: 55°
Operating temp.	-20°C~+50°C
Dimension(mm)	244(W)×270(H)×17(43)(D)
Installation hole size(mm)	207(W)×217(H)

ENTRANCE STATION

PARKING CONTROL AND
COMMUNITY LOBBY

DRC-10MP

NEW



Connect a
smartphone



BLE



RF card



Number
key



Rainshield(option)

- Entrance station, Parking control and Community lobby available
- Password, RFID, BLE(smartphone app) recognition
- Motion detection(Automatic guard call)
- Household and guard call & open door
- Built-in night LED
- Pin-hole camera

Power source	DC 12V / 1A
Display	2.4 inch OLED
Mount type	Flush-mounted type
Wiring ports	Household 1/2 : each 10 wires, Guard station : 8 wires, Monitor 4 wires, Switch : 3 wires(NO, NC selected), RS-232 : 3 wires, PIR : 3 wires
Distance	UTP(Cat.5e) : Max. 300m
Operation temp.	-20°~+50°
Dimension(mm)	130(W)×248(H)×12(23)(D)
Fill up box size(mm)	112(W)×211(H)

EXTENSION PANEL

DRC-24XM



- 24 Direct buttons call Extension panel (DRC-24XM)

Power source	From DRC-8TML
Mount type	Flush-mounted type
Operating temp.	-20°~+50°
Wiring ports	UTP(to DRC-8TML)
Dimension(mm)	130(W)×315(H)×10(D)
Installation hole size(mm)	110(W)×286(H)

ENTRANCE STATION

DRC-8TML



Connect a
smartphone



BLE



RF card



Number
key



- RF card registration and deletion possible (125KHz or 13.56MHz)
- 24Direct buttons panel(DRC-24XM)expansibility
- 8direct buttons & 10key
- BLE (Door open)
- OLED
- Pinhole camera

Power source	DC 12V / 1A
Operation temp.	-20°~+50°
Mount type	Flush-mounted type
Wiring ports	UTP
Min. Illumination	0.1Lux(up to 300mm)
Camera viewing angle	Horiz. : 75°, Vert. : 55°
Dimension(mm)	130(W)×315(H)×10(D)
Installation hole size(mm)	110(W)×286(H)

ENTRANCE STATION

DRC-GUC/RF1



- Paging and calling a household unit or a security guard station
- OLED
- Various verification methods (password and RFID card)

Power source	DC 12V, 1A
Mount type	Flush-mounted type
Operating temp.	-20°C~+40°C
Wiring ports	UTP(Cat. 5e)
Resolution	380TVL or 540TVL
Angle of view	Horiz.: 68°, Vert. : 55°
Dimension(mm)	130(W)×315(H)×10(38)(D)

AUDIO PHONE

AP-3SG



- Talk and door lock release enabled(both individual and public entrance)
- Security office call enabled

Power source	AC 110, 220, 240V, 50/60Hz
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	Common : UTP(Cat. 5e) Door camera : 3 wires
Distance	Lobby phone : 300m , Security office : 1Km
Dimension(mm)	94(W)×185(H)×38(D)

GUARD STATION

CDS-4GS



- Simple-to-use phone optimized for security station, exclusively for gate view
- Paging and calling a household
- Calling lobby phone
- Releasing door lock of public entrance

Power source	DC 12V, 1A
Power consumption	Max. : 2W
Mount type	Wall-mounted type / Desktop
Operating temp.	0°C~40°C
Wiring ports	UTP(Cat. 5e)
Distance	Max. 1Km
Dimension(mm)	196(W)×130(H)×51(D)

DISTRIBUTOR

CCU-4GF




- Enables "STAR" wiring method for Gate View monitor connections
- CCU-4GF-to-CCU-4GF enabled to expand up to 40 units limited to 300 meters

Power source	DC 12V, 1A
Mount type	Wall-mounted type
Transmission	Lobby 8 Lines(Polarity) (RJ45 CAT.5e Patch Cable)
Distance	Maximum 300m (Possible to connect Max 40 units)
Dimension(mm)	106(W)×76(H)×44(D)

ELEVATOR CONNECTOR

CCU-310EV



- Able to call from Lobbyphone and Monitor (Lobby mode / Unit mode)
- Unit mode : Able to set up to 630 units or 80 floors
- Lobby mode : Able to set up to 89 Lobbyphones

Power source	DC 12V, 1A
Mount type	Wall-mounted type, DIN rail type
Wiring ports	DATA : 2 wires Elevator S/W : 2 wires x 10ports
Distance	1km (0.65Ø)
Dimension(mm)	157(W)×86(H)×59(D)

AUDIO DOOR UNIT

DR-2GS



- Vandal proof
- Guard call and talk

Power source	DC 12V (from Guard Phone)
Mount type	Wall-mounted type
Operating temp.	-40°C~50°C
Wiring ports	6wires
Dimension(mm)	87(W)x120(H)x20(D)

DOORPHONE

AP-2RAG



- 2 wire connection with non-polarity from a floor distributor
- Talk with a visitor and door lock release enable

Power source	From floor distributor
Wiring ports	2 wires with non-polarity
Distance	100m (0.65Ø)
Operating temp.	0°C~40°C
Dimension(mm)	70(W)x210(H)x60(D)

ENTRANCE STATION

DR-2AG/RF1




- Expandability Up to 4~1,000 household units (Up to 3 RFID Card registration per household enabled)

Power source	DC 12V, 1A
Consumption	Standby : 400mA, Max. : 500mA
RFID card	13.56MHz (optional)
Mount type	Flush-mounted type
Wiring ports	Lobby phone-to-floor distributor : 1 UTP Household unit-to-floor distributor : 2 wires
Dimension(mm)	130(W)x315(H)x10(38)(D)

FLOOR DISTRIBUTOR

CCU-204AGF/208AGF



- 2 wire connection with non-polarity
- Provides the power to each household units
- 1UTP cabling between floor distributors

Power source	DC 24V, 3A
Port	4 / 8 channel (Connectable with 2 wire Audio phone up to 4/8/16/32 ea)
Wiring ports	-Lobby panel-to -Floor distributor : UTP -Household unit-to-Floor distributor : 2 wires -Floor distributor-to-Floor distributor : UTP

FLOOR DISTRIBUTOR

CCU-216AGF/232AGF



- 2 wire connection with non-polarity
- Provides the power to each household units
- 1UTP cabling between floor distributors

Power source	DC 24V, 3A
Port	16 / 32 channel (Connectable with 2 wire Audio phone up to 4 ea)
Wiring ports	-Lobby panel-to-Floor distributor : UTP -Household unit-to-Floor distributor : 2 wires -Floor distributor-to-Floor distributor : UTP

GUARD STATION

CDS-2AG



- Household unit call
- Lobby phone call
- CID function for a calling household identification
- 1UTP cabling for a simple installation from floor distributor

Power source	DC 12V, 1A
Mount type	Desktop
Wiring ports	Building distributor-to-Guard Station : UTP
Distance	Max. 1km
Dimension(mm)	230(W)x200(H)x35(D)

MONITOR

CDV-1024MA



DOOR LOCK CAMERA

* See the back of the actual content



PRODUCT FEATURES

- Security function(Security sensor 1,2)
- Connecting 2 individual door camera & 2 CCTV
(Call from individual door camera, all monitor will be displayed.)
- Intercommunicate between monitors(Page & Call)
- Saving image & movie clip(With Micro SD)
- Motion detection and image saving(optional)
- DVR function with SD card (256GB)
- 2MP camera

PRODUCT SPECIFICATION

Power source	AC 100-240V, 50/60Hz
Display	10.1 inch wide color LCD
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	Door camera : 4 wires / Expansion : 4 wires CCTV : 2 wires / Magnetic sensor : 2wires
Distance	Door camera : 50m(0.65Ø)
Power consumption	Max.18.5W, standby 3.5W
Dimension(mm)	308(W)x213(H)x23(D)

MONITOR

CDV-704MF



- Security function (Security sensor 1, 2)
- Connecting 2 individual door cameras & 2 CCTVs
(Call from individual door camera, all monitor will be displayed.)
- Intercommunicate between monitors(Page & Call)
- Saving image & movie clip (With Micro SD) • Motion detection and image saving(Optional) • DVR function with SD card (256GB) • 2MP camera

Power source	AC 100-240V, 50/60Hz
Display	7 inch wide color LCD
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	Door camera : 4 wires / Expansion : 4 wires CCTV : 2 wires / Magnetic sensor : 2 wires
Distance	Door camera : 50m(0.65Ø)
Power consumption	Max.18.5W, standby 3.5W
Dimension(mm)	244(W)x180(H)x18(D)

MONITOR

CDV-70MF



- Auto image & movie clip saving(Motion sensing)
- Security function(Wired sensor 1,2)
- Recording function with Micro SD card(256GB)
- Monitoring function(Door cameras & CCTVs)
- Controlling 2 Doors(Only CAM1) • 7 inch touch display
- Intercommunicating with Monitor & Interphone • 2MP camera

Power source	AC 100-240V, 50/60Hz
Display	7 inch touch display
Mount type	Wall-mounted type
Wiring ports	Door camera1, 2 : 4 wires x 2port Intercom: 4 wires, door detecting 1, 2 : 2 wires x 2 port CCTV1, 2 : 2 wires x 2port / Digital door lock : 4 wires (Power 2 : wires / opening short : 2 wires)
Distance	Door camera /intercom : 28m(Ø0.5)
Operating temp.	0°C~40°C
Dimension(mm)	244(W)x180(H)x18(D)

MONITOR

CDV-704MA

NEW



Connect devices



Videopicture auto recording



- Connecting 2 individual door cameras & 2 CCTVs (Call from individual door camera, all monitor will be displayed.)
- Intercommunicate between monitors(Page & Call)
- Saving image & movie clip (With Micro SD)
- Motion detection and image saving(Optional)
- CCTV Monitoring for main entrance • 1.3MP camera

Power source	AC 100-240V, 50/60Hz
Display	7 inch wide color LCD
Mount type	Wall-mounted type
Operation temp.	0°C~40°C
Wiring ports	Door camera : 4 wires / Expansion : 4 wires CCTV : 2 wires
Distance	Door camera : 50m(Ø0.65)
Power consumption	Max.15W, standby 3W
Dimension(mm)	244(W)×180(H)×18(D)

MONITOR

CDV-704MHA

NEW



Connect devices



Videopicture auto recording



- Connecting 2 individual door cameras & 2 CCTVs (Call from individual door camera, all monitor will be displayed.)
- Intercommunicate between monitors(Page & Call)
- Saving image & movie clip (With Micro SD)
- Motion detection and image saving(Optional)
- CCTV Monitoring for main entrance • 1.3MP camera

Power source	AC 100-240V, 50/60Hz
Display	7 inch wide color LCD
Mount type	Wall-mounted type
Operation temp.	0°C~40°C
Wiring ports	Door camera : 4 wires / Expansion : 4 wires CCTV : 2 wires
Distance	Door camera : 50m(Ø0.65)
Power consumption	Max.15W, standby 4W
Dimension(mm)	293(W)×180(H)×34(D)

DOOR LOCK CAMERA

DRC-40DK/41DK



RF card

123

Number key



- 2 Door open camera • 3 way access (PW, RF Card, Video phone) • Enter the password using 10key • Illuminance sensor
- House call and talk • Motion detection (PIR)
- DRC-40DK : wall-mounted type
DRC-41DK : Built-in type

Power source	DC 12V, 1A (Adaptor)
Operation temp.	-10°C~+50°C
Wiring ports	4 wires to a monitor / 2 wires to door 1 / 3 wires to door 2 (non-polarity)
Min. Illumination	0.1Lux (up to 300mm)
Lighting	Built-in white LED (3 pie) 2 EA
Imaging angle	110° diagonal
Camera viewing angle	Horiz. 75° Vert. 55°
Distance	28 meters (Ø0.5 UTP)
Dimension(mm)	DRC-40DK : 127(W)×193(H)×54(D) DRC-41DK : 127(W)×193(H)×63(D)

DOOR CAMERA

DRC-40YFD

2MP

2mega pixel



- 2 door open camera(CDV-70MF)
- Wall-mounted type
- House call and talk
- Built-in illumination sensor and white LED
- Both indoor and outdoor use
- FHD 2M pixel

Power source	DC 12V(From monitor)
Operation temp.	-10°C~+50°C
Wiring ports	Door 1 release : 2 wires Door 2 release : 3 wires
Camera viewing angle	Horiz. 75° Vert. 55°
Distance	50m(Ø0.65)
Dimension(mm)	102.5(W)×160(H)×50(D)

DOOR CAMERA

DRC-40KHD



- Wall-mounted type
- House call and talk
- Built-in illumination sensor and white LED
- Both indoor and outdoor use
- AHD 1.3M pixel

Power source	DC 12V(From monitor)
Operation temp.	-10°C~+50°C
Wiring ports	4 wires
Camera viewing angle	Horiz. 75° Vertical 55°
Distance	50m(Ø0.65)
Dimension(mm)	96(W)×155(H)×32(D)

MONITOR

CDV-70M



- 7 inch TFT LCD screen
- PAL/NTSC convertible
- Video talk and door lock release enable (both individual and public entrance)
- Support 2 Monitors, 2 Cameras and 2 Interphones

Power source	AC 100-240V, 50/60Hz
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	Door camera 1, 2 : 4 wires Interphone : 4 wires
Distance	Door camera : 28m(0.5Ø) / Interphone : 30m(0.65Ø)
Power consumption	Max.15W, standby 3W
Dimension(mm)	244(W)×180(H)×18(D)

MONITOR

CDV-70MH



- 7 inch TFT LED Display
- Video talk and door lock release enable
- PAL/NTSC convertible
- Support 2 Monitors, 2 Cameras and 2 Interphones

Power source	AC 100-240V, 50/60Hz
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	Door camera 1, 2 : 4wires Interphone : 4 wires
Distance	Door camera : 28m(0.5Ø) / Interphone : 30m(0.65Ø)
Dimension(mm)	293(W)×180(H)×34(D)

MONITOR

CDV-70MHM



- 7 inch TFT LED Display
- Video talk and door lock release enable
- PAL/NTSC convertible
- Support 2 Monitors, 2 Cameras and 2 Interphones
- Memory storing in Micro SD memory (SD Card is not included)

Power source	AC 100-240V, 50/60Hz
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	Door camera 1, 2 : 4wires Interphone : 4 wires
Distance	Door camera : 28m (0.5Ø) / Interphone : 30m(0.65Ø)
Power consumption	Max.15W, standby 3.5W
Dimension(mm)	293(W)×180(H)×34(D)

MONITOR

CDV-70H/70H2/70HM2



- 7 inch TFT LED Display
- Video talk and door lock release enable
- Support 2 monitors, 1 camera and 2 Interphones(CDV-70H)
- Support 2 monitors, 2 cameras and 2 Interphones(CDV-70H2/70HM2)
- Memory storing in Micro SD memory(SD Card is not included CDV-70HM2)
- PAL/NTSC convertible
- Intercommunication with sub monitor and interphone

Power source	AC 100-240V, 50/60Hz
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	CDV-70H : Door camera : 4 wires / Interphone : 4 wires CDV-70H2/70HM2 : Door camera 1, 2 : 4 wires / Sub interphone : 4 wires
Distance	Door camera : 28m(0.5Ø) Interphone : 30m(0.65Ø)
Dimension(mm)	180(W)×180(H)×28(D)

MONITOR

CDV-70N/70N2/70NM



- Video talk and door lock release enable
- Handset type design
- Expandable up to 1 door camera, 2 monitors and 2 interphones (CDV-70N)
- Expandable up to 2 monitors, 2 door cameras and 2 interphones (CDV-70N2)
- Memory storing in Micro SD memory (SD Card is not included CDV-70NM)

Power source	AC 100-240V, 50/60Hz
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	CDV-70N/70NM : Door camera : 4 wires / Interphone : 4 wires CDV-70N2 : Door camera 1, 2 : 4 wires / Sub interphone : 4 wires
Distance	Door camera : 28m(0.5Ø) Interphone : 30m(0.65Ø)
Dimension(mm)	230(W)×180(H)×28(D)

MONITOR

CDV-70K/70KM



- 7 inch TFT LCD screen
- Video talk and door lock release enable
- Expandable up to 2 monitors with 2 CCTV cameras and 2 door cameras
- Memory storing in SD memory storage (CDV-70KM)

Power source	AC 100-240V, 50/60Hz
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	Door camera 1, 2 : 4 wires Interphone : 4 wires
Distance	Door camera : 28m (0.5Ø) / Interphone : 30m(0.65Ø)
Dimension(mm)	311(W)×168(H)×32(D)

MONITOR(3 DOOR OPEN)

CDV-70KR3



- Door release enabled by monitoring (without visitor's call)
- 3 Door release function (front door, garage, back door)
- Support 2 Monitors, 2 Cameras, and 2 Interphones

Power source	AC 100-240V, 50/60Hz
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	Door camera 1, 2 : 4 wires Interphone : 4 wires
Distance	Door camera : 50m(0.65Ø) Interphone : 30m(0.65Ø)
Dimension(mm)	311(W)×168(H)×32(D)

MONITOR(PAN/TILT)

CDV-70KPT



- Digital Pan-Tilt(160° angle of view)
- Navigation buttons applied to maneuver display
- Support 2 Monitors, 2 Cameras and 2 Interphones
- PAL/NTSC convertible
- DRC-40KPT connectable

Power source	AC 100-240V, 50/60Hz
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	Door camera 1, 2 : 4 wires Interphone : 4 wires
Distance	Door camera : 50m(0.65Ø) Interphone : 30m(0.65Ø)
Dimension(mm)	311(W)×168(H)×32(D)

MONITOR

CDV-43M



- 4.3 inch TFT LCD screen
- Video talk and door lock release enable (both individual and public entrance)
- Support 2 Monitors, 2 Cameras and 2 Interphones
- PAL/NTSC convertible

Power source	AC 100-240V, 50/60Hz
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	Door camera 1, 2 : 4 wires Interphone : 4 wires
Distance	Door camera : 28m (0.5Ø) / Interphone : 30m(0.65Ø)
Dimension(mm)	180(W)×180(H)×28(D)

MONITOR

CDV-43MH



- 4.3 inch TFT LED display
- Video talk and door lock release enable
- Support 2 Monitors, 2 Cameras and 2 Interphones
- PAL/NTSC convertible

Power source	AC 100-240V, 50/60Hz
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	Door camera 1, 2 : 4 wires Interphone : 4 wires
Distance	Door camera : 28m (0.5Ø) / Interphone : 30m(0.65Ø)
Dimension(mm)	230(W)×180(H)×41(D)

MONITOR

CDV-43K/43K2/43KM



- Support 2 monitors, 1 camera and 2 Interphones(CDV-43K)
- Support 2 monitors, 2 cameras and 2 Interphones(CDV-43K2/43KM)
- Intercommunication with sub monitor and interphone
- Built-in memory storing in SD memory (SD Card is not included)(CDV-43KM)

Power source	AC 100-240V, 50/60Hz
Mount type	Wall-mounted type
Operating temp.	0°C~40°C
Wiring ports	CDV-43K/43KM : Door camera : 4 wires / Interphone : 4 wires CDV-43K2 : Door camera 1, 2 : 4 wires / Sub interphone : 4 wires
Distance	Door camera : 28m(0.5Ø) / Interphone : 30m(0.65Ø)
Dimension(mm)	157(W)×167(H)×28(D)

DOOR CAMERA

DRC-4CPN3



- Built-in illumination sensor
- Outdoor model
- Wall-mounted type
- House call and talk

Power source	DC 12V(From monitor)
Operating temp.	-10°C~+50°C
Wiring ports	4 wires
Lighting	Built-in white LED (3pie) 2 EA
Camera viewing angle	Horiz. 68° Vertical 55°
Distance	28m(0.5Ø) 50m(0.65Ø)
Dimension(mm)	58.7(W)×164(H)×42(D)

DOOR CAMERA

DRC-41M



- Wall-mounted type
- Built-in illumination sensor
- House call and talk
- Built-in white LED

Power source	DC 12V(From monitor)
Operating temp.	-10°C~+50°C
Wiring ports	4 wires
Camera viewing angle	Horiz. 75° Vertical 55°
Distance	50m(0.65Ø)
Dimension(mm)	112.2(W)×146.2(H)×44.3(D)

DOOR CAMERA

DRC-4M



- Built-in illumination sensor
- House call and talk
- Built-in white LED
- Flush mounted type

Power source	DC 12V(From monitor)
Operating temp.	-10°C~+50°C
Wiring ports	4 wires
Camera viewing angle	Horiz. 75° Vertical 55°(Adjustable)
Distance	50m(0.65Ø)
Dimension(mm)	112.2(W)×146.2(H)×44.3(D)

DOOR CAMERA

DRC-40K



- Illuminance sensor
- Out door model
- Surface-mounted type
- House call and talk
- Built-in white LED

Power source	DC 12V(From monitor)
Operating temp.	-10°C~+50°C
Wiring ports	4 wires
Camera viewing angle	Horiz. 75° Vertical 55°
Distance	50m(0.65Ø)
Dimension(mm)	96(W)×155(H)×32(D)

DOOR CAMERA

DRC-40KR2



- 2 Door open camera (CDV-70KR3/70AR3 Connectable)
- Illuminance sensor
- Outdoor model
- Surface-mounted type
- House call and talk
- Built-in white LED

Power source	DC 12V(From monitor)
Operating temp.	-10°C~+50°C
Wiring ports	4 wires to a monitor Door 1 release : 2 wires Door 2 release : 3 wires
Camera viewing angle	Horiz. 75° Vertical 55°
Distance	50m(0.65Ø)
Dimension(mm)	96(W)×155(H)×32(D)

DOOR CAMERA

DRC-40KPT



- Pan-Tilt camera(PT Connectable)
- 160° angle of view
- Illuminance sensor
- Outdoor model
- Surface-mounted type
- House call and talk
- Built-in white LED

Power source	DC 12V(From monitor)
Operating temp.	-10°C~+50°C
Wiring ports	4 wires
Camera viewing angle	Horiz. 82° Vertical 50°
Distance	50m(0.65Ø)
Dimension(mm)	96(W)×155(H)×32(D)

MULTI BUTTON DOOR CAMERA (ONLY FOR FINE VIEW)

MULTI BUTTON DOOR CAMERA is optimized for small sized apartment and condo complexes and can be combined with COMMAX FINE VIEW SERIES.



MULTI BUTTON DOOR CAMERA

DRC-2/4/6/8/10ML/RF1



- RF card registration and deletion possible
- Extendable to DRC-24XM(F)
- 2/4/6/8/10 direct buttons
- OLED
- Built-in white LED

Power source	DC12V/1A
Operation temp.	-20°C~+50°C
Wiring ports	4 wires
Camera viewing angle	Horiz. : 75° Vert. : 55°
Distance	28m(0.5Ø) 50m(0.65Ø)
Dimension(mm)	DRC-2(4)ML/RF1 : 130(W)x246(H)x50(D) DRC-6(8,10)ML/RF1 : 130(W)x315(H)x50(D)

EXTENSION PANEL

DRC-24XM(F)



- 24 Direct buttons panel(DRC-24XM) expansibility
- 10 direct buttons
- Extendable to DRC-24XM(F)

Power source	From DRC-6/8/10ML
Mount type	Flush-mounted type
Operation temp.	-20°C~+50°C
Dimension(mm)	130(W)x315(H)x10(D)
Installation hole size(mm)	110(W)x286(H)

MULTI BUTTON DOOR CAMERA

DRC-2UC



- 2 button wide name plate
- Material : Aluminum
- House call and talk
- Built-in white LED
- DC 12V, 1A

Operation temp.	-10°C~+50°C
Wiring ports	4 wires
Camera angle adjusting	Ascendant : 13° Descendant : 13°
Distance	28m(0.5Ø) 50m(0.65Ø)
Dimension(mm)	130(W)×250(H)×50(D)
Installation hole size(mm)	115(W)×223(H)
Fillup box size(mm)	122(W)×239(H)×10(37)(D)

MULTI BUTTON DOOR CAMERA

DRC-3UC



- 3 button wide name plate
- Material : Aluminum
- House call and talk
- Built-in white LED
- DC 12V, 1A

Operation temp.	-10°C~+50°C
Wiring ports	4 wires
Camera angle adjusting	Ascendant : 13° Descendant : 13°
Distance	28m(0.5Ø) 50m(0.65Ø)
Dimension(mm)	130(W)×250(H)×50(D)
Installation hole size(mm)	115(W)×223(H)
Fillup box size(mm)	122(W)×239(H)×10(37)(D)

MULTI BUTTON DOOR CAMERA

DRC-4UC



- 4 button wide name plate
- Material : Aluminum
- House call and talk
- Built-in white LED
- DC 12V, 1A

Operation temp.	-10°C~+50°C
Wiring ports	4 wires
Camera angle adjusting	Ascendant : 13° Descendant : 13°
Distance	28m(0.5Ø) 50m(0.65Ø)
Dimension(mm)	130(W)×250(H)×50(D)
Installation hole size(mm)	115(W)×223(H)
Fillup box size(mm)	122(W)×239(H)×10(37)(D)

MULTI BUTTON DOOR CAMERA

DRC-5UC



- 5 button wide name plate
- Material : Aluminum
- House call and talk
- Built-in white LED
- DC 12V, 1A

Operation temp.	-10°C~+50°C
Wiring ports	4 wires
Camera angle adjusting	Ascendant : 13° Descendant : 13°
Distance	28m(0.5Ø) 50m(0.65Ø)
Dimension(mm)	130(W)×315(H)×50(D)
Installation hole size(mm)	115(W)×289(H)
Fillup box size(mm)	122(W)×305(H)×10(37)(D)

MULTI BUTTON DOOR CAMERA

DRC-6UC



- 6 button wide name plate
- Material : Aluminum
- House call and talk
- Built-in white LED
- DC 12V, 1A

Operation temp.	-10°C~+50°C
Wiring ports	4 wires
Camera angle adjusting	Ascendant : 13° Descendant : 13°
Distance	28m(0.5Ø) 50m(0.65Ø)
Dimension(mm)	130(W)×315(H)×50(D)
Installation hole size(mm)	115(W)×289(H)
Fillup box size(mm)	122(W)×305(H)×10(37)(D)

MULTI BUTTON DOOR CAMERA

DRC-7UC



- 7 button wide name plate
- Material : Aluminum
- House call and talk
- Built-in white LED
- DC 12V, 1A

Operation temp.	-10°C~+50°C
Wiring ports	4 wires
Camera angle adjusting	Ascendant : 13° Descendant : 13°
Distance	28m(0.5Ø) 50m(0.65Ø)
Dimension(mm)	130(W)×315(H)×50(D)
Installation hole size(mm)	115(W)×289(H)
Fillup box size(mm)	122(W)×305(H)×10(37)(D)

MULTI BUTTON AUDIO UNIT

DR-24ML

NEW



- 24 button wide name plate
- Metal design
- House call and talk
- LED light
- Connect with expansion panel
- Connect with DP-SS, DP-RS

Power source	DC 12V, 1.5A
Data Transmission	3 wire in common + 1 wire
Dimension (mm)	130(W)×405(H)×50(D)

MULTI BUTTON AUDIO UNIT

DR-2UM



- 2 button wide name plate
- Material : Aluminum • LED light
- House call and talk • DC 12V

Data transmission	3 wire in common + 1 wire
Communication	Hands-free type
Dimension(mm)	130(W)×315(H)×50(D)
Installation hole size(mm)	110(W)×284(H)
Fillup box size(mm)	130(W)×315(H)×10(37)(D)

MULTI BUTTON AUDIO UNIT

DR-4UM



- 4 button wide name plate
- Material : Aluminum • LED light
- House call and talk • DC 12V

Data transmission	3 wire in common + 1 wire
Communication	Hands-free type
Dimension(mm)	130(W)×315(H)×50(D)
Installation hole size(mm)	110(W)×284(H)
Fillup box size(mm)	130(W)×315(H)×10(37)(D)

MULTI BUTTON AUDIO UNIT

DR-6UM



- 6 button wide name plate
- Material : Aluminum • LED light
- House call and talk • DC 12V

Data transmission	3 wire in common + 1 wire
Communication	Hands-free type
Dimension(mm)	130(W)×315(H)×50(D)
Installation hole size(mm)	110(W)×284(H)
Fillup box size(mm)	130(W)×315(H)×10(37)(D)

MULTI BUTTON AUDIO UNIT

DR-8UM



- 8 button wide name plate
- Material : Aluminum • LED light
- House call and talk • DC 12V

Data transmission	3 wire in common + 1 wire
Communication	Hands-free type
Dimension(mm)	130(W)×315(H)×10(D)
Installation hole size(mm)	110(W)×284(H)
Fillup box size(mm)	130(W)×315(H)×10(37)(D)

MULTI BUTTON AUDIO UNIT

DR-NUS



- Slave panel
- DR-4US/6US/8US/10US/12US
- Material : Aluminum • LED light
- House call and talk • DC 12V

Data transmission	3 wire in common + 1 wire
Communication	Hands-free type
Dimension(mm)	130(W)×315(H)×10(D)
Installation hole size(mm)	110(W)×284(H)
Fillup box size(mm)	130(W)×315(H)×10(37)(D)

DOORPHONE

DP-RS



- Door release
- Talk with a visitor
- User friendly handset design with convenient hand grip
- Link with Multi-Panel (DR-nUM)

Power source	DC 12V(from Multipanel)
Mount type	Wall-mounted type (Bracket included)
Wiring ports	4 wires
Distance	Door unit : 100m (0.65Ø)
Dimension(mm)	58.3(W)×209(H)×48(D)

DOORPHONE

DP-2LD



- Battery operated(6V) or DC 9~12V Adaptor
- 2 wires with non-polarity
- Door release
- Talk with a visitor

Power source	AA size 1.5V battery x 4, DC 9~12V Adaptor
Mount type	Wall-mounted type(Bracket included)
Wiring ports	Call : Non-polar 2 wires Door Release : 2 wires
Distance	Door unit : 100m (0.65Ø)
Dimension(mm)	98(W)×208(H)×38(61)(D)
Battery life	15 months (stand-by) 9 months (use 15 times a day)

DOORPHONE

DP-2S



- 2 wires with non-polarity
- User friendly handset design with convenient hand grip
- Talk with a visitor
- Door release

Power source	AC 110/220/230/240V 50/60Hz
Mount type	Wall-mounted type
Wiring ports	Call : 2 wires Door Release : 2 wires (1.6Ø Copper wire)
Distance	100m(0.65Ø), 150m(0.8Ø)
Dimension(mm)	108(W)×210(H)×33(61)(D)

DOORPHONE

DP-LA101M/S



- Talk with a visitor
- Door release
- 2 wires with non-polarity
- Power supply for door lock release(12V)

Power source	AC 220V, 50Hz only
Mount type	Wall-mounted type
Wiring ports	Call : 2 wires Door Release : 2 wires Master/Slave : 6 wires
Distance	50m Door to Room(0.65Ø) 30m Room to Room(0.65Ø)
Dimension(mm)	98(W)×208(H)×43(D)

DOORPHONE

DP-201LA



- Talk with a visitor
- Door release
- 2 wires with non-polarity
- AC 12V Power enable with Door release button

Power source	AC 220V, 50Hz only
Mount type	Wall-mounted type
Wiring ports	Call : 2 wires Door Release : 2 wires
Distance	100m(0.65Ø) 150m(0.8Ø)
Dimension(mm)	98(W)x208(H)x43(D)

DOORPHONE

DP-LA01M/S



- Talk with a visitor
- Door release
- 2 wires with non-polarity
- User friendly handset design with convenient hand grip

Power source	AC 110/220/230/240V, 50/60Hz
Mount type	Wall-mounted type
Wiring ports	Call : 2 wires Door Release : 2 wires Master/Slave : 5 wires
Distance	50m Door to Room 30m Room to Room
Dimension(mm)	98(W)x208(H)x43(D)

DOORPHONE

DP-SS



- Up to 40 households
- Talk with a visitor
- Door release

Power source	DC 12V (Supplied by DR-nUM)
Mount type	Wall-mounted type
Wiring ports	DR-num : 4 wires Door release : 2 wires
Dimension(mm)	72(W)x210(H)x33(61)(D)

DOORPHONE

DP-ML



- Talk with a visitor
- Door release
- Up to 40 households
- Talk with a guard(DP-ML)

Power source	AC 220V, 50Hz
Mount type	Wall-mounted type
Wiring ports	4 wires
Distance	100m(0.65Ø) 150m(0.8Ø)
Dimension(mm)	98(W)x208(H)x38(61)(D)

AUDIO DOOR UNIT

DR-201D



- House call and talk
- 2-wire entrance panel

Power source	DC 9V (from Doorphone)
Mount type	Wall-mounted type
Operation temp.	-10°C~+40°C
Wiring ports	2 wires
Dimension(mm)	96(W)×140(H)×42(D)

AUDIO DOOR UNIT

DR-2L



- House call and talk
- 2-wire entrance panel

Power source	DC 9V (from Doorphone)
Mount type	Wall-mounted type
Operation temp.	-10°C~+40°C
Wiring ports	2 wires
Dimension(mm)	126(W)×186(H)×23(D)

AUDIO DOOR UNIT

DR-2K



- House call and talk
- 2-wire entrance panel

Power source	DC 9V(from Doorphone)
Mount type	Wall-mounted type
Operation temp.	-10°C~+40°C
Wiring ports	2 wires
Dimension(mm)	96(W)×128(H)×26(D)

AUDIO DOOR UNIT

DR-2GN



- Vandal proof
- House call and talk
- 2-wire entrance panel

Power source	DC 9V(from Doorphone)
Mount type	Wall-mounted type
Operation temp.	-10°C~+40°C
Wiring ports	2 wires
Dimension(mm)	88(W)×120(H)×21(D)

AUDIO DOOR UNIT

DR-2PN



- Vandal proof
- House call and talk
- 2-wire entrance panel

Power source	DC 9V(from Doorphone)
Mount type	Wall-mounted type
Operation temp.	-10°C~+40°C
Wiring ports	2 wires
Dimension(mm)	50(W)×118(H)×25(D)

INTERPHONE

TP-NR



PRODUCT FEATURES

- Talk with a visitor
- User friendly handset design with convenient hand grip

PRODUCT SPECIFICATION

Power source	DC 24V(from TP-12RM)
Mount type	Wall-mounted type
Wiring ports	2 wires
Distance	100m(0.65Ø), 150m(0.8Ø)
Dimension(mm)	58.3(W)×209(H)×48(D)

WIRELESS INTERPHONE

WT-171L(M/S)



- 1:1 Paging & Calling
- Auto frequency switching function to eliminate interference

Power source	AC 100-240V, 50/60Hz
Mount type	Desk-top & Wall-mounted type
Wiring ports	Wireless
Distance	Open area : 250m (with barrier : 50m)
Frequency	1.7 GHz~1.9GHz
Dimension(mm)	98(W)×208(H)×43(66)(D)

WIRELESS DOORPHONE

WDP-174L(M/S) WDR-174DS



- 1:1 call with a door unit
- Talk with a visitor
- Door release via WDR-174DS (wireless door unit)

Power source	WDP-174L : AC 100-240V, 50/60Hz WDR-174DS : DC 12V
Mount type	Desktop & Wall-mounted type
Wiring ports	Wireless
Distance	Open area : 250m (with barrier : 50m)
Frequency	1.7GHz~1.9GHz
Dimension(mm)	WDP-174L : 98(W)×208(H)×43(66)(D) WDR-174DS : 91(W)×134(H)×22(D)

INTERPHONE

TP-6RC



- Variable system composition(6 units)
- ID setting enabled with dip switch
- Effective calling to all units by paging function
- Door lock release
- Calling & paging

Power source	DC 12V, 200mA
Mount type	Wall-mounted type
Wiring ports	Common 4 wires
Distance	500m(0.65Ø)
Dimension(mm)	116(W)×208(H)×43(65)(D)

INTERPHONE

TP-12RC



- Variable system composition(12 units)
- ID setting enabled with dip switch
- Effective calling to all units by paging function
- Door lock release
- Calling & paging

Power source	DC 12V, 200mA
Mount type	Wall-mounted type
Wiring ports	Common 4 wires
Distance	500m(0.65Ø)
Dimension(mm)	116(W)×208(H)×43(65)(D)

INTERPHONE

TP-12RM



- Supporting up to 12 pcs of TP-S, TP-NR(sub-unit)
- Covering total system just through one power installation
- Calling to each station
- LED indication

Power source	DC 24V, 170mA
Mount type	Wall-mounted type
Wiring ports	Invisible 2 wires
Distance	1Km(0.65Ø)
Dimension(mm)	116(W)×208(H)×43(65)(D)

INTERPHONE

TP-90RN



- Paging • Speaker phone
- Caller ID display on FND display
- 3 Channel simultaneous communication
- Group call • Broadcasting
- Privacy function
- Expandable up to 90 pcs

Power source	DC 24V, 120mA
Mount type	Wall-mounted type
Wiring ports	Common 10wires
Distance	1Km(0.65Ø)
Dimension(mm)	116(W)×208(H)×43(65)(D)

INTERPHONE

TP-1L



- Recommended for hospital, guard station and office environment
- 1:1 paging and talking feature
- Convenient & Flexible installation using 1.5V batteries

Power source	AA size 1.5V battery 4ea
Mount type	Wall-mounted type
Wiring ports	Invisible 2 wires
Distance	100m(0.65Ø)
Dimension(mm)	98(W)×208(H)×42.7(D)

INTERPHONE

TP-S



- Calling to TP-12RM
- Talking to TP-12RM

Power source	DC 24V (form TP-12RM)
Mount type	Wall-mounted type
Wiring ports	Call : 2 wires
Distance	100m(0.65Ø) 150m(0.8Ø)
Dimension(mm)	72(W)×215(H)×38(D)

INTERCOM

CM-801/800



CM-801

CM-800

- Enabling long distance communication through PTT function
- Calling to household
- Indicating in-use status

Power source	DC 12V, 200mA
Consumption	Standby : 7mA Max : 160 mA
Operation temp.	0°C~+40°C
Wiring ports	2 wires
Distance	300m(0.65Ø)
Dimension(mm)	183(W)×169(H)×41(D)

INTERCOM

CM-810/800S



CM-810

CM-800S

- Calling ID display on the FND display with adjustable sound level
- Expandable up to 10 Units
- Enabling long distance communication through PTT

Power source	DC 12V, 200mA
Consumption	Standby : 60mA Max : 370mA
Operation temp.	0°C~+40°C
Wiring ports	2 wires
Distance	300m(0.65Ø)
Dimension(mm)	183(W)×169(H)×41(D)

INTERCOM

CM-810M



- Calling ID display on the FND display with adjustable sound level
- Expandable up to 10 Units
- Enabling long distance communication through PTT

Power source	DC 12V, 1A
Consumption	Standby : 50mA Max : 100mA
Operation temp.	0°C~+40°C
Wiring ports	10 wires + n
Distance	200m(0.65Ø)
Dimension(mm)	183(W)×169(H)×41(D)

WIRELESS INTERCOM

WI-3SN



- No cross of wires
- Can be installed anywhere with AC outlet
- Enabling long distance communication through PTT(priority call function)

Power source	AC 100/120/220/230/ 240V, 50/60Hz
Wiring ports	Wireless
Dimension(mm)	186(W)×133(H)×44(D)

WIRELESS INTERCOM

WI-2B



- No cross of wires
- Available to install anywhere with AC outlet
- Enabling long communication through PTT(priority call function)

Power source	AC 100/120/220/230/ 240V, 50/60Hz
Wiring ports	Wireless
Dimension(mm)	143(W)×141(H)×47(D)

POWER INTERCOM

PI-30LN/20LN/10LN



- System capacity: Max 30
- Group paging & whole paging and communicating
- Receiving Lamp(flicker)
- Control speaker volume and beep sound

Power source	AC 100/120/220/230/ 240V, 50/60Hz
Wiring ports	2 wires(STAR)
Distance	2Km(0.65Ø)
Dimension(mm)	313(W)×228(H)×98(D)

SMART DOOR LOCK

SMART DOOR LOCK is an access control system with proven safety, usability and leading design for your home security.



BIO DOOR LOCK

CDL-88PBio



PRODUCT FEATURES

- Premium Push-Pull design
- 6 way access methods
(Face recognition, RF Card, Pin number, Fingerprint, Mechanical Key, Connected Monitor(option))
- Durable body using metallic material for protecting against high temp. and shock
- High temp. detection, alert and automatic unlocking
- Multi-layered authentication
(Pin number+RF Card / Pin number+Fingerprint)
- Automatic lock / Re-lock / Double lock functions
- Safe to use the pin number with dummy number
- Anti high-voltage / Fireproof / Anti-hacking system
- Connectivity with home network system using remote controller(option)
- Emergency power(9V square battery)

PRODUCT SPECIFICATION

Applicable	Normal fire door	Thickness 40mm ~ 80mm	
	Pin number (Face recognition unit)	6~8 digit number combination (Up to 100 pin number)	
	Access methods	Pin number (Number plate)	4~12 digit number combination (Up to 4 pin number)
		RF card	Up to 100 cards
		Mechanical Key	Individual mechanical lock
		Fingerprint	Up to 100 Fingerprints
Power source	DC 6V	Alkaline AA battery 8pcs(LR6 1.5V AA size)	
Type of product	Fireproof type, Temperature sensor type, Key type, Master key door lock		
Temp. alarm	Temperature sensor	60 degree ± 10 degree	
Option	Remote module(CDL-447)		
Dimension(mm)	84(W)x454(H)x50(D)		

PREMIUM DOOR LOCK

CDL-88P

NEW



BROWN SILVER

BLACK SILVER BLACK GOLD

PRODUCT FEATURES

- Premium Push-Pull design
- 5 WAY Access methods (RF card, Pin number, Fingerprint, Mechanical key, Connected Monitor(option))
- Durable body using metallic material for protecting against high temp. and shock
- High temp. detection, alert and automatic unlocking
- Multi-layered authentication (Pin number+RF Card / Pin number+Fingerprint)
- Automatic lock / Re-lock / Double lock functions
- Safe to use the pin number with dummy number
- Anti high-voltage / Fireproof / Anti-hacking system
- Connectivity with home network system using remote controller(option)
- Emergency power(9V square battery)

PRODUCT SPECIFICATION

Applicable	Normal fire door	Thickness 40mm ~ 80mm
	Pin number	4~12 digit number combination (Up to 4 pin number)
Access methods	RF card	Up to 30 cards
	Mechanical Key	Individual mechanical lock
	Fingerprint	Up to 100 Fingerprints
Power source	DC 6V	Alkaline AA battery, 8pcs(LR6 1.5V AA size)
Type of product	Fireproof type, Temperature sensor type, Key type, Master key door lock	
Temp. alarm	Temperature sensor 60 degree ± 10 degree	
Option	Remote module(CDL-447)	
Dimension(mm)	84(W)x454(H)x50(D)	

ROCK AND LOCK

CDL-800WL/100WL



PRODUCT FEATURES

- CDL-800WL : 2 way access methods(Pin number, Fingerprint)
- CDL-100WL : 2 way access methods(RF Card, Pin number)
- Durable body using metallic material for protecting against high temp. and shock
- High temp. detection, alert and automatic unlocking
- CDL-800WL: Multi-layered authentication(Pin number+Fingerprint)
- CDL-100WL: Multi-layered authentication(Pin number+RF Card)
- Automatic lock / Re-lock / Double lock functions
- Anti high-voltage / Anti-hacking system
- Emergency power(9V square battery + Micro USB 5pin)

PRODUCT SPECIFICATION

Applicable	Indoor door	Thickness 35mm ~ 50mm
Access methods	Pin number	4~12 digit number combination (Up to 4 pin number)
	Fingerprint(CDL-800WL)	Up to 100 Fingerprints
	RF card(CDL-100WL)	Up to 30 cards
Power source	DC 6V	Alkaline AA battery, 4pcs(LR6 1.5V AA size)
Emergency	DC 9V	Alkaline battery(optional) Micro USB 5pin
Type of product	Temperature sensor type	
Temp. alarm	Temperature sensor	60 degree ± 10 degree (Normal test)
Option	CDL-800WL : Remote module(CDL-800WLC)	
	CDL-100WL : Remote module(CDL-100WLC)	
Dimension(mm)	95(W)x95(H)x71(D)	

SMART DOOR LOCK

CDL-107U



PRODUCT FEATURES

- 4 way door opening(easy opening with smartphone)
- Send a mobile key to a visitor's mobile that is valid only at certain times on specific dates
- Open / close the door outside the home through Z-Wave Hub (Z-Wave is for Americas only)
- Real-time alerts let you check your family's home
- Battery replacement notice
- Dual security with imaginary number function
- High temp. sensor function • Etiquette mode (sound setting function)
- External power supply for battery discharge

PRODUCT SPECIFICATION

Applicable	Indoor door	Thickness 35mm ~ 50mm
Access methods	Pin number	4~10 digit number combination
	RF card	Up to 30 cards
	BLE	Smartphone
	Mechanical key	Individual mechanical lock
Power source	DC 6V	Alkaline AA battery, 4pcs(LR6 1.5V AA size)
Emergency	DC 9V	Alkaline battery (Optional)
Type of product	Temperature sensor type	
Temp. alarm	Temperature sensor	60 degree ± 10 degree (Normal test)
Dimension(mm)	85(W)x175(H)x30(D)	

SMART DOOR LOCK

CDL-220PB



reddot award 2017
winner



Connect a
smartphone



BLE



PRODUCT FEATURES

- 4 way access methods(RF Card, Pin number, Mechanical Key, BLE)
- Durable body for protecting against high temp. and shock
- High temp. detection, alert and automatic unlocking
- Multi-layered authentication(Pin number/RF Card)
- Automatic lock / Re-lock / Double lock functions
- Safe to use the pin number with dummy number
- Anti high-voltage / Fireproof / Anti-hacking system
- Connectivity with home network system using remote controller(option)
- Emergency power(9V square battery)

PRODUCT SPECIFICATION

Applicable	Normal fire door	Thickness 40mm ~ 60mm
	Pin number	4~12 digit number combination (Up to 4 pin number)
Access methods	RF card	Up to 30 cards
	BLE	Smartphone
	Mechanical key	Individual mechanical lock
Power source	DC 6V	Alkaline AA battery, 8pcs(LR6 1.5V AA size)
Type of product	Fireproof type, Temperature sensor type, Key type, Master key door lock	
Temp. alarm	Temp. sensor	60 degree ± 10 degree
Dimension(mm)	80(W)x382(H)x71(D)	

* To properly install and use the APP please check the website or catalog.

SMART DOOR LOCK

CDL-200P/210P



reddot award 2017
winner



CDL-200P

CDL-210P

PRODUCT FEATURES

- 3(4) way access methods
(RF card, Pin number, Mechanical key, Fingerprint(CDL-210P))
- Durable body using metallic material for protecting against high temp. and shock
- High temp. detection, alert and automatic unlocking
- Automatic lock / Re-lock / Double lock functions
- Safe to use the pin number with dummy number
- Anti high-voltage / Fireproof / Anti-hacking system
- Connectivity with home network system using remote controller(option)
- Emergency power(9V square battery)

PRODUCT SPECIFICATION

Applicable	Normal fire door	Thickness 40mm ~ 60mm
	Pin number	4~12 digit number combination (Up to 4 pin number)
Access methods (3WAY : CDL-200P 4WAY : CDL-210P)	RF card	Up to 30 cards
	Mechanical key	Individual mechanical lock (Key type only)
	Fingerprint	Up to 100 Fingerprints(CDL-210P)
Power source	DC 6V	Alkaline AA battery, 8pcs(LR6 1.5V AA size)
Type of product	Fireproof type, Temperature sensor type, Key type, Master key door lock	
Temp. alarm	Temp. sensor	60 degree ± 10 degree
Option	Remote module(CDL-447)	
Dimension(mm)	80(W)x382(H)x71(D)	

WIRELESS DOOR LOCK

CDL-200L/210L



PRODUCT FEATURES

- 3(4) WAY ACCESS methods
(RF Card, Pin number, Mechanical Key, Fingerprint(CDL-210L))
- Automatic lock / Re-lock / Double lock functions
- Safe to use the pin number with dummy number
- Connectivity with home network system using remote controller(option)
- Emergency power(9V square battery)

PRODUCT SPECIFICATION

Applicable	Normal fire door	Thickness 40mm ~ 60mm
Access methods (3WAY : CDL-200L 4WAY : CDL-210L)	Pin number	4~12 digit number combination (Up to 4 pin number)
	RF card	Up to 30 cards
	Mechanical key	Individual mechanical lock (Key type only)
	Fingerprint	Up to 100 Fingerprints(CDL-210L)
Power source	DC 6V	Alkaline AA battery, 8pcs(LR6 1.5V AA size)
Type of product	Fireproof type, Temperature sensor type, Key type, Master key door lock.	
Temp. alarm	Temp. sensor	60 degree ± 10 degree
Option	Remote module(CDL-447)	
Dimension(mm)	77(W)x302(H)x71(D)	

SMART DOOR LOCK

CDL-400M/410M/400MC/410MC



- 2 way access methods (RF Card, Pin number)
- Automatic lock / Re-lock / Double lock • Emergency power(9V square battery)
- Safe to use the pin number with dummy number
- Multi-registrations for pin-number & electronic key
- Home networking of remote controller(CDL-400MC/CDL-410MC)

Applicable	Normal fire door	Thickness 40mm ~ 60mm
Access methods	Pin number	4~12 digit number combination (Up to 4 pin number)
	RF card	Up to 30 cards
Power source	DC 6V	Alkaline AA battery, 4pcs(LR6 1.5V AA size)
Type of product	Temperature sensor type, Non key type, Master key door lock	
Temp. alarm	Temp. sensor	60 degree ± 10 degree
Dimension(mm)	80(W)x230(H)x63(D)	

SMART DOOR LOCK

CDL-300L/310L



- 3(4) way access methods
(RF Card, Pin number, Mechanical key, Fingerprint(CDL-310L))
- Durable body for protecting against high temp. and shock
- Connectivity with home network system using remote controller(option)
- Emergency power(5V Mirco USB)

Applicable	Normal fire door	Thickness 40mm ~ 60mm
Access methods (3WAY : CDL-300L 4WAY : CDL-310L)	Pin number	4~12 digit number combination (Up to 4 pin number)
	RF card	Up to 30 cards
	Mechanical key	Individual mechanical lock
	Fingerprint	Up to 100 Fingerprints(CDL-831L)
Power source	DC 6V	Alkaline AA battery, 8pcs(LR6 1.5V AA size)
Type of product	Fireproof type, Temperature sensor type, Key type, Master key door lock	
Temp. alarm	Temp. sensor	60 degree ± 10 degree
Option	Remote module(CDL-447)	
Dimension(mm)	80(W)x330(H)x71(D)	

IP GATE SYSTEM

IP HOME IoT



CIP-1000QX
MONITOR

page.08



CIP-710Q
MONITOR

page.08



CIP-710M
MONITOR

page.09



CIOT-L20M/L20M2
ENTRANCE
STATION

page.09



DRC-40QFD
DOOR CAMERA

page.09



CHM-2200
A.I. HOME MIRROR

page.13



CAP-1000A
A.I. MONITOR

page.13



CSM-3200
A.I. SMART MIRROR

page.14



CIOT-1000Y
MONITOR

page.14



CIOT-1020M/1020M2
MONITOR

page.15



CIOT-700M/700M2
MONITOR

page.15



CIOT-700ML
MONITOR

page.15



CIOT-LBIO
BIO LOBBY

page.16



CIOT-L20M/L20M2
ENTRANCE
STATION

page.16



CIOT-L20MP
ENTRANCE
STATION

page.17



CIOT-L7FM
ENTRANCE
STATION

page.17



CIOT-L8TM
ENTRANCE
STATION

page.17



CIOT-L2TM
ENTRANCE
STATION

page.17



CIOT-L10M
ENTRANCE
STATION

page.17



CIOT-24XM
ENTRANCE
STATION

page.17



CIOT-D20DK
DOOR LOCK
CAMERA

page.18



CIOT-D20Y
DOOR CAMERA

page.18



CIOT-D21M/D20M
DOOR CAMERA

page.18



CIOT-D20P
DOOR CAMERA

page.18

IoT GATE VIEW

SMART HOME SYSTEM



IPEC-911R
EMERGENCY
CALL UNIT

page.19



CIOT-G700M/G701M
GUARD STATION

page.19



CAV-1000QGX/1001QGX
MONITOR

page.25



CAV-70QGX
MONITOR

page.26



CAV-1020MGX+/1021MGX+
MONITOR

page.26



CAV-70MGX+
MONITOR

page.27



CDP-1400YB
MONITOR

page.29



CDP-1000YB
MONITOR

page.29



CDP-1020YB
MONITOR

page.29



CDP-1400MB
MONITOR

page.30



CSH-1020MB
MONITOR

page.30



CDP-1020MB
MONITOR

page.30



DRC-BIO5
BIO LOBBY

page.31



DRC-7MS
ENTRANCE
STATION

page.31



CKV-1020FS
KITCHEN TV
PHONE

page.32



CDS-70M
GUARD STATION

page.32

MODUM SYSTEM (HYBRID SYSTEM)



CMV-70MX
MONITOR

page.38



CMV-70S/70SD
MONITOR

page.38



CMV-77K/77KD
MONITOR

page.38



CMV-70M/70MD
MONITOR

page.38



CMV-43S/43SD
MONITOR

page.39



CMV-43A/43AD
MONITOR

page.39



CMA-3L/3LD
AUDIO PHONE

page.39



DRC-7MBL/RF1
ENTRANCE
STATION

page.39



CMP-2BCT/4BCT
ENTRANCE
STATION

page.40



CMP-2BC/4BC
ENTRANCE
STATION

page.40



CMP-CTS/RF1
ENTRANCE
STATION

page.40



CMP-2BCS/4BCS
ENTRANCE
STATION

page.40



CMP-2BAT/4BAT
ENTRANCE
STATION

page.40



CMP-2BA
ENTRANCE
STATION

page.41



CMP-4BX
ENTRANCE
STATION

page.41



CMP-2BX
ENTRANCE
STATION

page.41

SMATE GATE SYSTEM



DRC-900LC/RF1
ENTRANCE
STATION

page.41



DRC-GUM
ENTRANCE
STATION

page.41



DRC-NP
EXTENSION
NAME
PANEL

page.41



DRC-12UX
EXTENSION
PANEL

page.42



CDS-2AG
GUARD STATION

page.43



CDS-481L
GUARD STATION

page.43



CAV-705MX
MONITOR

page.45



CAV-711M
MONITOR

page.45

GATE VIEW



CAV-70HS
MONITOR

page.46



CDP-1020ID
MONITOR

page.46



DRC-7MBL/RF1
ENTRANCE
STATION

page.47



DRC-703LC/RF1
ENTRANCE
STATION

page.47



CDS-481L
GUARD STATION

page.47



CAV-70MG2
MONITOR

page.49



CAV-70MG+
MONITOR

page.49



CAV-70MG
MONITOR

page.50



CAV-70MHG
MONITOR

page.50



CAV-43MHG
MONITOR

page.50



CAV-43MG
MONITOR

page.50



CAV-43MG2
MONITOR

page.51



DRC-BIOL
BIO LOBBY

page.51



DRC-7MBL/RF1
ENTRANCE
STATION

page.51



DRC-703LC/RF1
ENTRANCE
STATION

page.51



DRC-10MP
ENTRANCE
STATION

page.52

AUDIO GATE SYSTEM (2 WIRES & UTP)



DRC-8TML
ENTRANCE
STATION

page.52



DRC-24XM
EXTENSION
PANEL

page.52



DRC-GUC/RF1
ENTRANCE
STATION

page.52



CDS-4GS
GUARD STATION

page.53



DR-2GS
AUDIO DOOR
UNIT

page.55



AP-2RAG
DOORPHONE

page.55



DR-2AG/RF1
ENTRANCE
STATION

page.55



CDS-2AG
GUARE STATION

page.55

HOME BLACK BOX



CDV-1024MA
MONITOR

page.57



CDV-704MF
MONITOR

page.57



CDV-70MF
MONITOR

page.57



CDV-704MA
MONITOR

page.58



CDV-704MHA
MONITOR

page.58



DRC-40DK/41DK
DOOR LOCK
CAMERA

page.58



DRC-40YFD
DOOR CAMERA

page.58



DRC-40KHD
DOOR CAMERA

page.58

FINE VIEW



DRC-4CPHD/4CPHD2
DOOR CAMERA

page.59



DRC-4CPNK
DOOR CAMERA

page.59



CDV-70M
MONITOR

page.61



CDV-70MH
MONITOR

page.61



CDV-70MHH
MONITOR

page.61



CDV-70H/70H2/70HM2
MONITOR

page.61



CDV-70N/70N2/70NM
MONITOR

page.61



CDV-70K/70KM
MONITOR

page.62



CDV-70KR3
MONITOR

page.62



CDV-70KPT
MONITOR

page.62



CDV-43M
MONITOR

page.62



CDV-43MH
MONITOR

page.62



CDV-43K/43K2/43KM
MONITOR

page.62



DRC-4CPN3
DOOR CAMERA

page.63



DRC-41M
DOOR CAMERA

page.63



DRC-4M
DOOR CAMERA

page.63

MULTI BUTTON DOOR CAMERA



DRC-40K
DOOR CAMERA

page.63



DRC-40KR2
DOOR CAMERA

page.63



DRC-40KPT
DOOR CAMERA

page.63



DRC-2/4ML/RF1
MULTI BUTTON
DOOR CAMERA

page.64



DRC-6/8/10ML/RF1
MULTI BUTTON
DOOR CAMERA

page.64



DRC-24XM(F)
EXTENSION PANEL

page.64



DRC-2UC
MULTI BUTTON
DOOR CAMERA

page.65



DRC-3UC
MULTI BUTTON
DOOR CAMERA

page.65

MULTI BUTTON AUDIO UNIT



DRC-4UC
MULTI BUTTON
DOOR CAMERA
page.65



DRC-5UC
MULTI BUTTON
DOOR CAMERA
page.65



DRC-6UC
MULTI BUTTON
DOOR CAMERA
page.65



DRC-7UC
MULTI BUTTON
DOOR CAMERA
page.65



DR-24ML
MULTI BUTTON
AUDIO UNIT
page.67



DR-2UM
MULTI BUTTON
AUDIO UNIT
page.67



DR-4UM
MULTI BUTTON
AUDIO UNIT
page.67



DR-6UM
MULTI BUTTON
AUDIO UNIT
page.67

DOORPHONE



DR-8UM
MULTI BUTTON
AUDIO UNIT
page.67



DR-NUS
MULTI BUTTON
AUDIO UNIT
page.67



DP-RS
DOORPHONE
page.69



DP-2LD
DOORPHONE
page.69



DP-2S
DOORPHONE
page.69



DP-LA101M/S
DOORPHONE
page.69



DP-201LA
DOORPHONE
page.70



DP-LA01M/S
DOORPHONE
page.70

INTERPHONE / INTERCOM



DP-SS
DOORPHONE
page.70



DP-ML
DOORPHONE
page.70



DR-201D
AUDIO DOOR UNIT
page.71



DR-2L
AUDIO DOOR UNIT
page.71



DR-2K
AUDIO DOOR UNIT
page.71



DR-26N
AUDIO DOOR UNIT
page.71



TP-NR
INTERPHONE
page.73



WT-171L(M/S)
WIRELESS
INTERPHONE
page.73



WDP-174L(M/S)
WDR-174DS
WIRELESS
DOORPHONE
page.73



TP-6RC
INTERPHONE
page.74



TP-12RC
INTERPHONE
page.74



TP-12RM
INTERPHONE
page.74



TP-90RN
INTERPHONE
page.74



TP-1L
INTERPHONE
page.74



TP-S
INTERPHONE
page.74



CM-801/800
INTERCOM
page.75



CM-810/800S
INTERCOM
page.75



CM-810M
INTERCOM
page.75



WI-3SN
WIRELESS
INTERCOM
page.75



WI-2B
WIRELESS
INTERCOM
page.75



PI-30LN/20LN/10LN
POWER INTERCOM
page.75

SMART DOORLOCK



CDL-88PBio
BIO DOORLOCK

page.93



CDL-88P
PREMIUM
DOORLOCK

page.94



CDL-800WL/100WL
ROCK AND LOCK

page.95



CDL-107U
SMART
DOORLOCK

page.95



CDL-220PB
SMART
DOORLOCK

page.96



CDL-200P/210P
SMART
DOORLOCK

page.96



CDL-200L/210L
SMART
DOORLOCK

page.97



**CDL-400M/410M/
400MC/410MC**
SMART
DOORLOCK

page.97

HOSPITAL COMMUNICATION SYSTEM



CDL-300L/310L
SMART
DOORLOCK

page.97



JNS-3000
BED HEAD
CONSOLE

page.99



JNS-1000
BED HEAD
CONSOLE

page.99



JNS-4CS
BED HEAD
CONSOLE(4 WIRES)

page.99



JNS-70MN
MAIN NURSE
STATION(4 WIRES)

page.99



JNS-4CM
NURSE STATION

page.100



JNS-PSM
MAIN PANEL

page.100



**MANAGEMENT
PROGRAM
SOFTWARE**

page.100



JNS-360
OPERATING
ROOM STATION

page.100



JNS-6K0
OPERATING
ROOM CALL SYSTEM

page.101



FS-600
OPERATING
ROOM FOOT SWITCH

page.101



JNS-36
OPERATING
ROOM STATION

page.101



AS-100
OPERATING ROOM
ARM SWITCH

page.101



CNS-70MN
MAIN NURSE
STATION

page.102



CNS-8CS
BED HEAD CONSOLE

page.102



CNS-PSM
MAIN PANEL

page.102



CNS-8CD
NURSE CALL
SWITCH

page.102



CNS-8AS
OPERATING ROOM
SWITCH

page.102



CNS-812LD/812MD
DISTRIBUTOR

page.102



PB-500
PRESENCE SWITCH

page.103



ES-400
EM. SWITCH

page.103



ES-420
SHOWER
EM. SWITCH

page.103



CC-200
CALL CORD SW

page.103



PS-100
PILLOW
SPEAKER

page.103



CL-302I
CORRIDOR LIGHT

page.103

A.I. HOME MIRROR


MONITOR




CHM-2200




CDP-1400MB




CDP-1400YB




CAV-1000QGX




CDP-1000YB




CDP-1020YB



CSH-1020MB



CAV-1020MGX+
CDP-1020MB




BIO LOBBY


ENTRANCE STATION




CDP-1020ID




CAV-705MX




CIOT-LBIO
DRC-BIOS
DRC-BIOL



CIOT-L20M/L20M2
DRC-7MS




DRC-7MBL/RF1

(W)249mm
(H)256mm
(W)210mm
(H)216mm

DRC-703LC/RF1

(W)244mm
(H)270mm
(W)207mm
(H)217mm

**CIOT-L20MP
DRC-10MP
DRC-2/4ML**




(W)130mm
(H)248mm
(W)112mm
(H)211mm

**CMP-CTS/RF1
CMP-2BCS/4BCS**





(W)130mm
(H)248mm
(W)112mm
(H)211mm

EXTENSION PANEL

**CIOT-L7FM
CIOT-L8TM
CIOT-L2TM
CIOT-L10M
CIOT-24XM
CMP-2BCT**


**CMP-4BCT
CMP-2BC
CMP-4BC
CMP-2BAT
CMP-4BAT
CMP-2BA**

**CMP-4BX
CMP-2BX
DRC-GUM
DRC-8TML
DRC-GUC/RF1
DR-2AG/RF1**



(W)130mm
(H)315mm
(W)110mm
(H)286mm

**DRC-24XM
DRC-NP
DRC-12UX**



(W)130mm
(H)315mm
(W)110mm
(H)286mm


MULTI BUTTON DOOR CAMERA

DRC-2/4ML/RF1





(W)130mm
(H)248mm
(W)112mm
(H)211mm

DRC-6/8/10ML/RF1


(W)130mm
(H)315mm
(W)110mm
(H)286mm

DRC-2/3/4UC

(W)130mm
(H)250mm
(W)115mm
(H)223mm

DRC-5/6/7UC





(W)130mm
(H)315mm
(W)115mm
(H)289mm


MULTI BUTTON AUDIO UNIT



DR-24ML

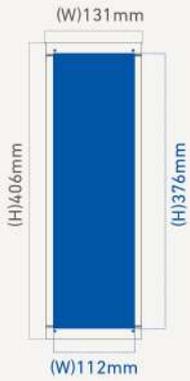


**DR-2UM
DR-4UM
DR-6UM
DR-8UM
DR-NUS**

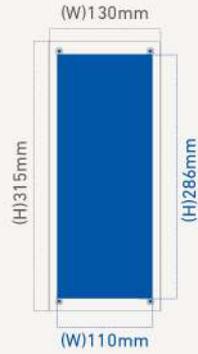


SMART DOORLOCK



**CDL-88PBio
BIO DOORLOCK**



**CDL-88P
PREMIUM
DOORLOCK**




**CDL-800WL/100WL
SMART
DOORLOCK**




**CDL-107U
SMART
DOORLOCK**




**CDL-220PB/
200P/210P
SMART
DOORLOCK**



**CDL-200L/210L
SMART
DOORLOCK**



**CDL-400M/410M/
400MC/410MC
SMART
DOORLOCK**



**CDL-300L/310L
SMART
DOORLOCK**

